
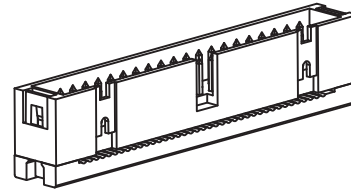


REV.	SPECIFICATION	ECN NO.	APPD.
A4		01/27'07	

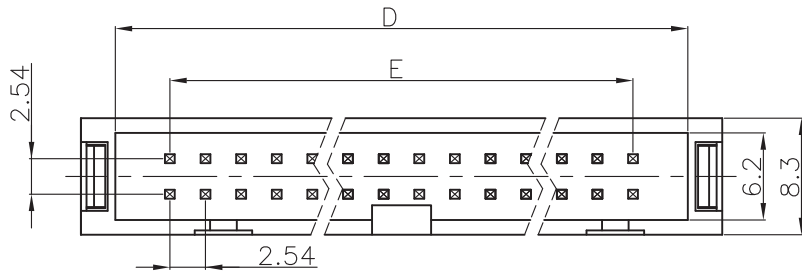

(A4)



Material:

Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Brass.
 Strain Relief: 30% Glass filled PBT UL94V-0.


Electrical Characteristics:

Current Rating: 1AMP.
 Insulator Resistance: 5000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+105°C .


***RoHS Compliant**

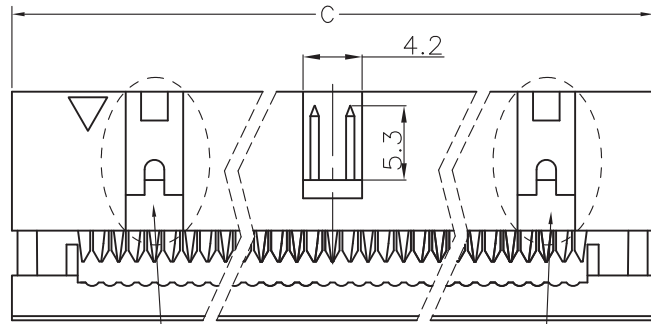

10,14,16P Without this organization

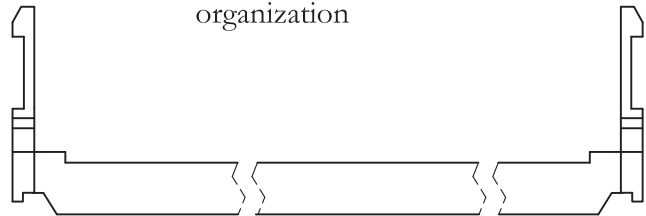

Strain Relief

Tolerances x = ±0.5 .x = ±0.25 .xx = ±0.15	Drawn No. 3016D01002	Title:		 GTK UK LTD.			
	Projection						
	Unit mm	Scale 1:1	Drawn By Michael		SHEET 1/1	Ver.No.	A4