

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

ROHS COMPLIANT


REVISONS		APPROVED BY	DATE
REV	ECN NO.	DESCRIPTION	
A		KING CHIU	2006-06-15

Product Specification





Material
 Insulator : Glass-Filled Thermoplastic PBT,UL94V-0 rated
 Contact : Copper alloy
 Shell : Steel, 100u" Tin Over 50u" min Copper
 Clinch Nut: Brass, 100u" min Nickel Plated.
 Boardlock :Brass, 100u" min Tin Plated.

Electrical
 Contact Resistance :20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance :1000
 megohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating :3 AMP
 Voltage Rating :250 VAC/rms 60Hz

PCB LAYOUT PATTERN

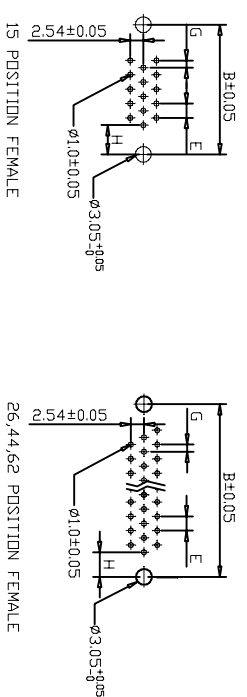

Dimensions	A	B	D	E
15	30.81	24.99	16.33	2.29
26	39.14	33.32	24.66	2.29
44	53.04	47.04	38.38	2.29
62	69.32	63.50	54.84	2.41

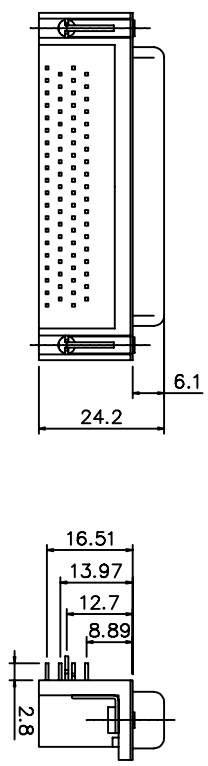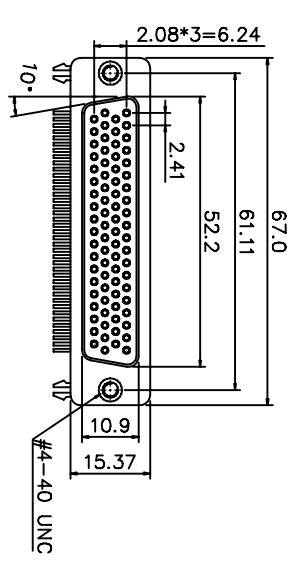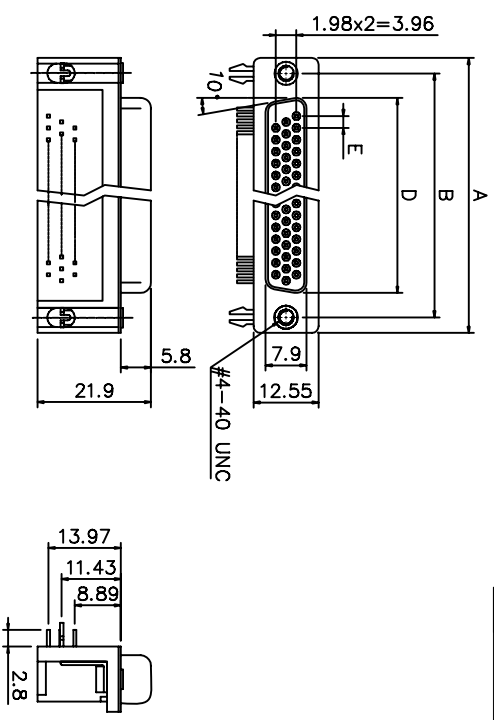

Positions	G	H
15M/F	1.145	7.04
26M/F	1.145	6.88
44M/F	1.145	6.88
62M/F	1.205	7.00

78 Positions

DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [MM] <input checked="" type="checkbox"/> MM ONLY	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	GTK UK LTD.	TITLE D-SUB H.D. RIGHT ANGLE TYPE	P/N HDL**STK2NS-R	SCALE:	SIZE: A3	FILE NO:
					1 : 1		7
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES X ±0.28 (0.0115) X° ±3° X ±0.25 (0.0101) X° ±1.0° XX ±0.13 (0.0051)	DRAWN BY AND DATE JUSTIN KING 12-28-02	GTK UK LTD.			REV A		
FINISH	CHECKED BY AND DATE JUSTIN KING 12-28-02	THIRD ANGLE PROJECTION			SHEET 1 OF 1		