


CONTACTS	A	B	CONTACTS	A	B
DP-6P	12.94	5.08	DP-26P	38.40	30.48
DP-8P	15.48	07.62	DP-28P	40.60	33.02
DP-10P	18.10	10.16	DP-30P	43.50	35.56
DP-12P	20.51	12.70	DP-34P	48.58	40.64
DP-14P	23.05	15.24	DP-40P	56.20	48.26
DP-16P	25.64	17.78	DP-50P	69.00	60.96
DP-18P	28.15	20.32	DP-60P	81.75	73.66
DP-20P	30.78	22.86	DP-64P	86.83	78.74
DP-24P	35.86	27.94			

Recommended P.C. Board
Hole Layout



ROHS COMPLIANT

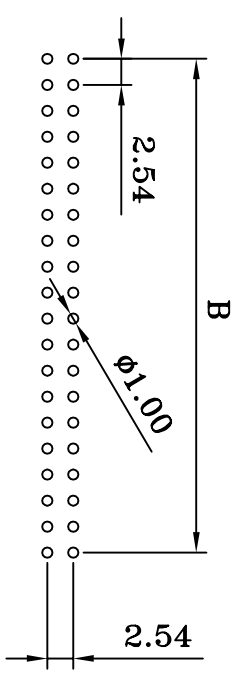

PART NO		DPXXXXN-R	X	X	XX
1:	FD-11-XXBKHO		±0.2	±0.2	±0.2
BOM 2:	FD-14-XXBKMO				
3:	FDT-B				
DRAWING NO		FD-00017	EDITION: B		ITEM: FD
DRAWN BY		LIN	2005/09/12		SCALE: 1:1
APPROVAL BY					UNIT: m.m
TEL:(02)86481727 FAX:(02)86482427					

MATERIALS:
INSULATOR:P. B. T. 30%GLASS FIBER, UE94V-0
CONTACT MATERIAL:BRASS OR PHOSPHOR BRONZE,
GOLD FLASH OVER NICKEL

ELECTRICAL:
CURRENT RATING:1AMP.
INSULATION RESISTANCE:1000M Ω MIN.
DIELECTRIC WITHSTANDING:500VAC
OPERATING TEMPERATURE:-55 °C~+105 °C