

# 2400 Series

## FEATURES:


- 2-20 Circuits
- .045" [1.14mm] Square wire pins or round pin
- Nylon, [UL 94V-2] or [UL 94-0]
- Straight or Right angle pins
- Mate with Center Crimp connector [2410]

## SPECIFICATIONS:

- Current rating: 7A AC. DC
- Voltage rating: 250V AC. Maximum
- Temperatur range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Contact resistance: Initial Value/10m $\Omega$  max.  
After environmental testing  
/20m $\Omega$  max.
- Insulation resistance: 5000 M $\Omega$  min
- Withstand voltage: 1500V AC/minute
- Applicable PC board thickness: .063" [1.6mm]

PIN	DIM.A	DIM.B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56

PIN	DIM.A	DIM.B
12	43.56	47.58
13	47.52	51.48
14	51.48	55.44

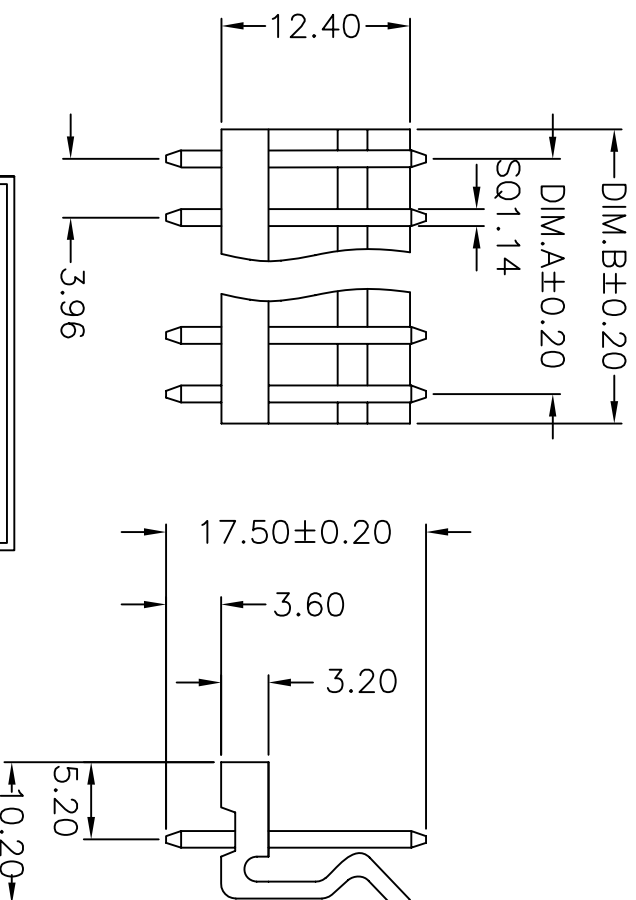

ROHS COMPLIANT

TITLE:	CUSTOMER APPROVAL				DRAWN:		<b>GTK UK LTD.</b>		
	REVISION				CHECKED	DATE			
P/N:	REV.	DESCR.	DATE	SIGN	APPROVED	DATE	SCALE	UNIT	MM
2400-XX-ST-R						2003.11.07			