



2600 Series

FEATURES:



- 02~20 Circuits
- Friction lock
- Nylon 66 [UL 94V-2]
- .025"[0.64mm] right angle or straight square wire pins
- Mates With 2510 Housing

SPECIFICATIONS:


- Current rating: 3A AC, DC
- Voltage rating: 250V AC, Maximum
- Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Contact resistance: Initial Value/10m Ω max.
After environmental testing
/20m Ω max.
- Insulation resistance: 5000 M Ω min
- Withstand Voltage: 1500V AC/minute
- Applicable PC board thickness: .063"[1.6mm]

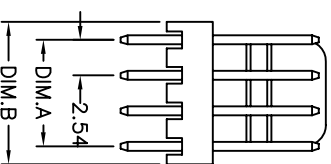

(2 through 5 circuits)

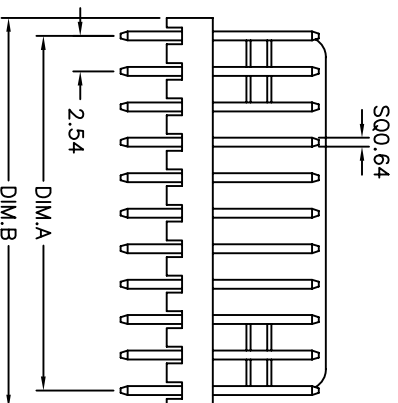

(6 through 20 circuits)

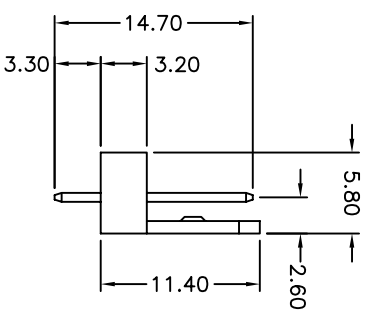

±0.25

Circuits	DIM.A	DIM.B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.7
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.4
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	
17	40.64	
18	43.18	
19	45.72	
20	48.26	

ROHS COMPLIANT

TITLE: CUSTOMER APPROVAL

REVISION			
REV.	DESCR.	DATE	SIGN

P/N: 2500-XX-ST-R

DRAWN: CHECKED

APPROVED

DATE 2003.03.17

SCALE

UNIT

MM



GTK UK LTD.