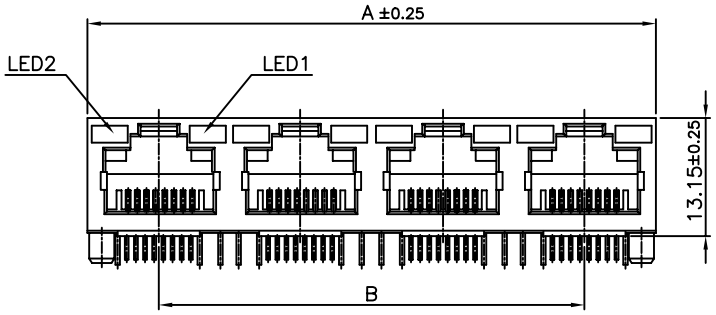



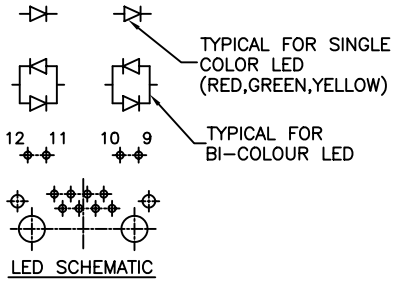

LED SCHEMATIC



BI-COLOUR LED DETAIL
(GREEN/AMBER AND YELLOW/GREEN LED'S ARE ALSO AVAILABLE)

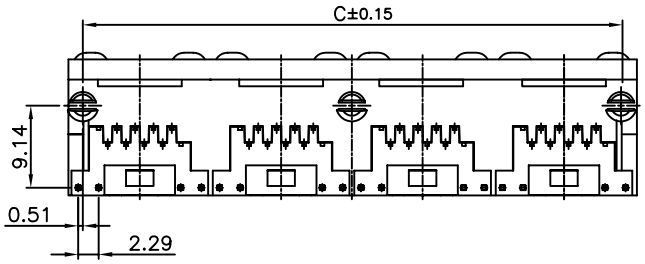

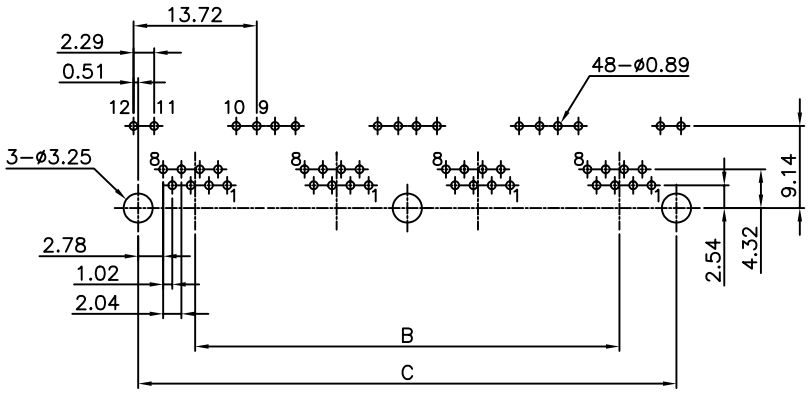

P.C.B LAYOUT/TOP VIEW

CODE	LED 2(LEFT)	LED 1(RIGHT)
0	NO LED	NO LED
1	YELLOW	GREEN
2	NO LED	GREEN
3	GREEN	YELLOW
4	GREEN	GREEN
5	YELLOW	YELLOW
6	YELLOW/GREEN	YELLOW/GREEN
7	GREEN/RED	GREEN/RED
8	YELLOW/GREEN	YELLOW

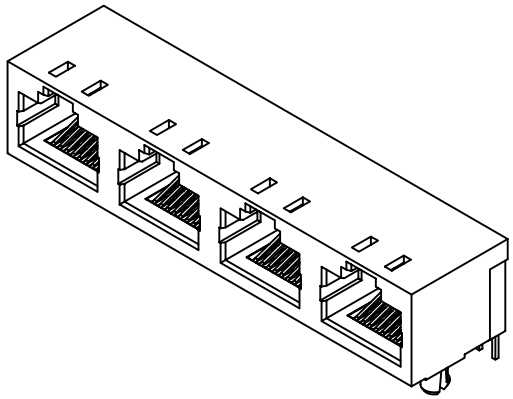

Ordering Information	No.of Ports	Dimension			
		A	B	C	D
MTCL-188X1-NB-R MTCL-188X4-NB-R	1	15.91		12.70	2.25
MTCL-288X1-NB-R MTCL-288X4-NB-R	2	31.66	15.75	28.45	2.37
MTCL-488X1-NB-R MTCL-488X4-NB-R	4	63.16	47.25	59.94	2.37
MTCL-688X1-NB-R MTCL-688X4-NB-R	6	94.66	78.75	91.45	2.37
MTCL-888X1-NB-R MTCL-888X4-NB-R	8	126.16	110.25	122.94	2.37

MATERIALS:
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.
CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT,
TIN PLATING OVER NICKEL IN SOLDER AREA.

RoHS COMPLIANT

GTK UK LTD.

APPROVED		C/PART NO.	
DRAWING		ITEM NO.	

Cable length
Unless Other Spec.
Tolerances:

0 ~0.2M	±0.01M
0.21~1.0M	±0.02M
1.1 ~1.5M	±0.025M
1.51~2.1M	±0.03M
2.1M ↑	±0.04M