


P.C.B LAYOUT/TOP VIEW

CODE	LED 2(LEFT)	LED 1(RIGHT)
0	NO LED	NO LED
1	YELLOW	GREEN
2	NO LED	GREEN
3	GREEN	YELLOW
4	GREEN	GREEN
5	YELLOW	YELLOW
6	YELLOW/GREEN	YELLOW/GREEN
7	GREEN/RED	GREEN/RED
8	YELLOW/GREEN	YELLOW

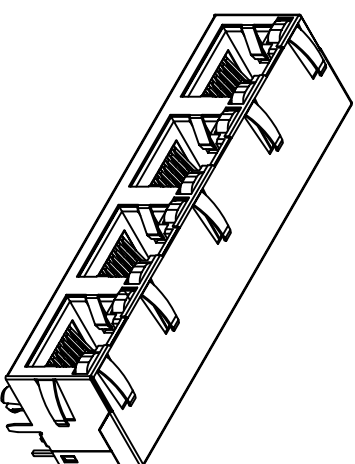

Ordering Information	No. of Ports	Dimension				
		A	B	C	D	E
MTCI-188X1-SB-R	1	16.51		12.70	2.54	16.26
MTCI-188X4-SB-R	2	32.26	15.75	28.45	2.67	32.00
MTCI-288X1-SB-R	4	63.76	47.25	59.94	2.67	63.50
MTCI-488X1-SB-R	6	95.26	78.75	91.45	2.67	95.02
MTCI-688X1-SB-R	8	126.76	110.25	122.94	2.67	126.51

ROHS COMPLIANT

MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT,
 TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELD: BRASS PLATING NICKEL ALLOY.



GTK UK LTD.

APPROVED	C/PART NO.	ITEM NO.

Cable length Unless Other Spec.
 Tolerances:
 0 ~0.2M ±0.01M
 0.21~1.0M ±0.02M
 1.1 ~1.5M ±0.025M
 1.51~2.1M ±0.03M
 2.1M ± 0.04M