


FEATURES:

- 2-24 Circuits
- Housing: High temperature LCP, UL 94V-0
- Plating: Tin , select Gold
- Contact: Brass

SPECIFICATIONS:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, Maximum
- Temperature range: -40°C ~ +105°C
- Contact resistance: Initial Value/10mΩ max.
- Insulation resistance: 1000 MΩ min
- Withstand Voltage: 1500V AC/minute

Circuits	Dim.A	Dim.B	Dim.C
2	6.65	3.00	4.30
4	9.65	3.00	7.30
6	12.65	6.00	10.30
8	15.65	9.00	13.30
10	18.65	12.00	16.30
12	21.65	15.00	19.30
14	24.65	18.00	22.30
16	27.65	21.00	25.30
18	30.65	24.00	28.30
20	33.65	27.00	31.30
22	36.65	30.00	34.30
24	39.65	33.00	37.30

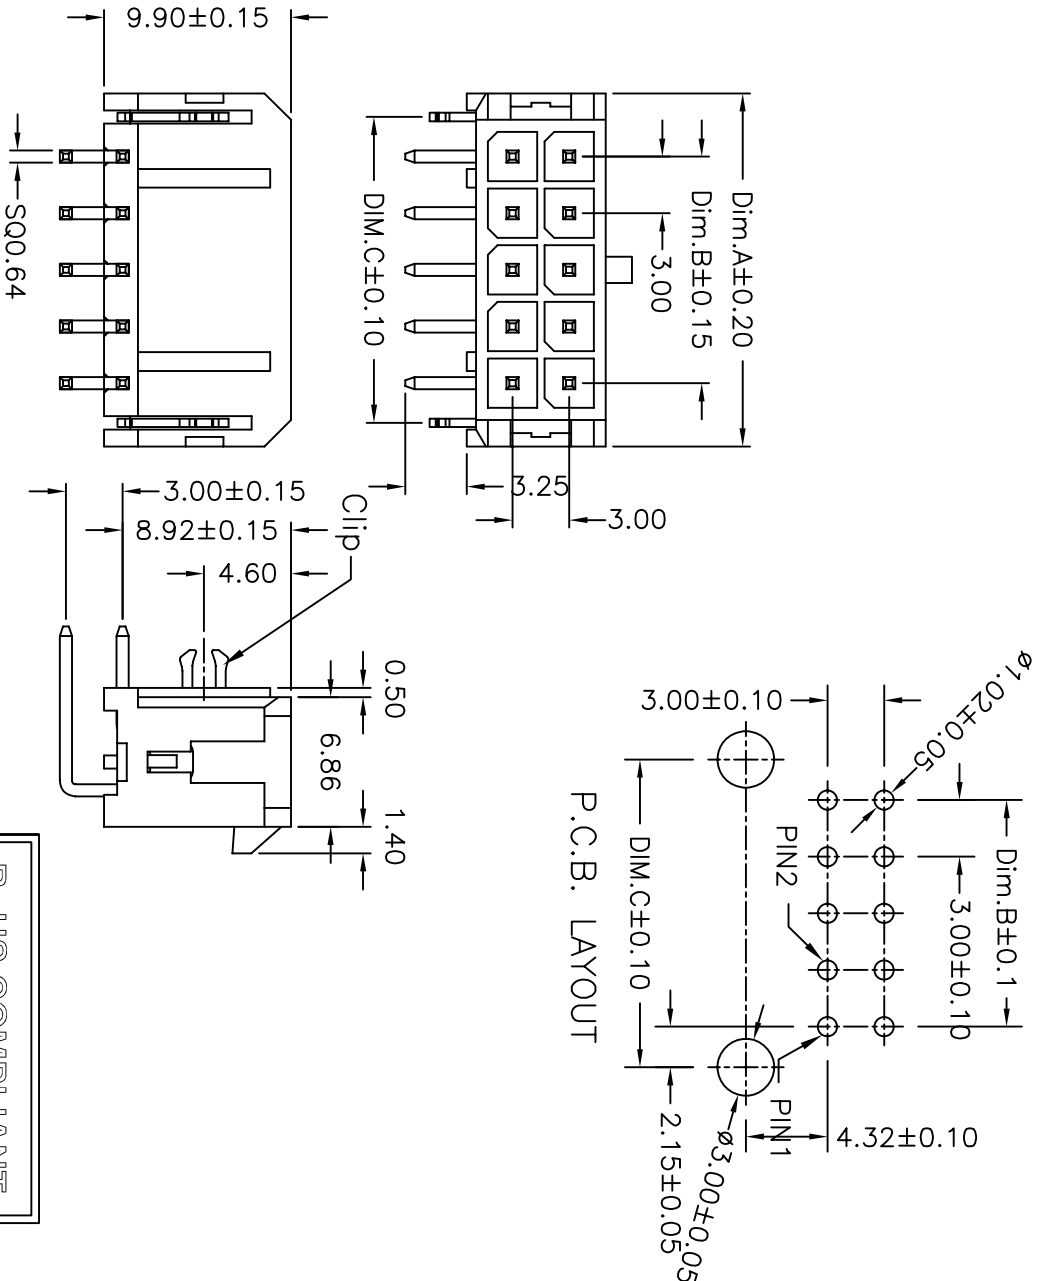

ROHS COMPLIANT

TITLE: CUSTOMER APPROVAL

REVISION				THIRD ANGLE PROJECTION	
REV.	DESCR.	DATE	SIGN	DRAWN:	CHECKED



GTK UK LTD.

P/N: MPC-XX-DT1-R						DATE: 2006.01.11	SCALE:	UNIT: MM
?? : \\A19\p\MIRIAM\ENGINEER\13045 \13045			APPROVED					