



IEEE 1394

IEEE1394 Cable Assemblies
Cables and Adaptors

for more information call
01344 304123

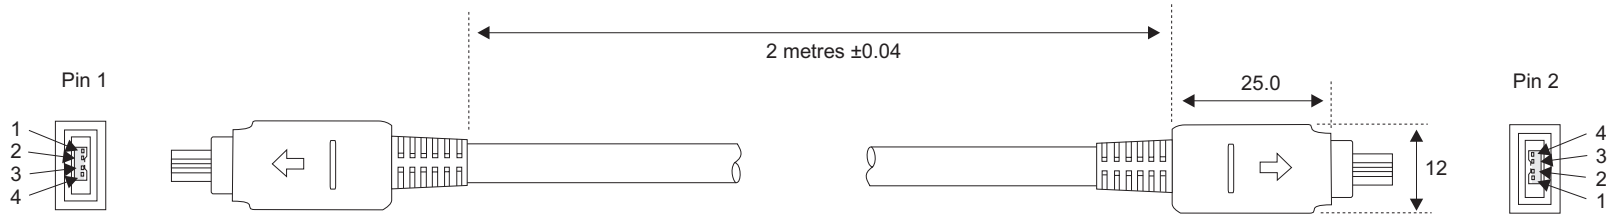

Pin Assignment

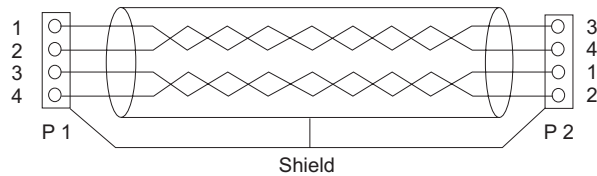

Specifications

- IEEE Receptacle x 2 (4P)
- 4 position connector assembled, black


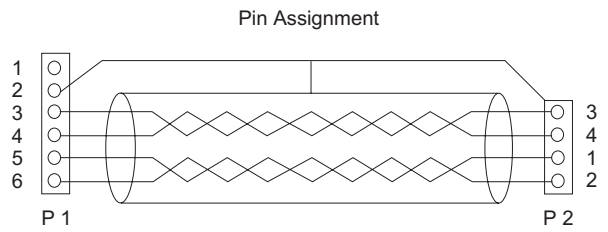
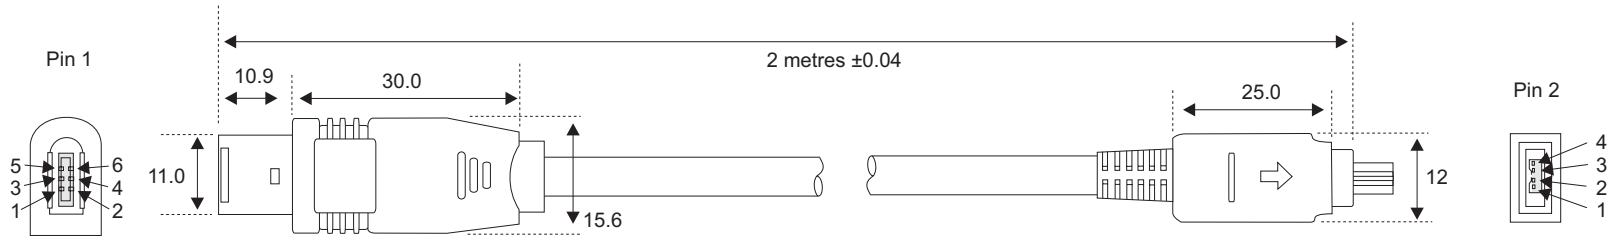
- Cable Specification UL20276
- 2 x pair 28 AWG
- Cable OD 3.5 mm ± 0.5 mm
- Colour Grey PVC
- Cable Length from 0.5 m to 4.5 m
- Multishield - Aluminium Mylar Foil/Braid

Part Number: MFW44CN-Length in metres				
Description: IEEE 1394 Cable Assembly	Drawn: RL	Aug 99	Units: mm	
	Checked:	Rev: 03	Sheet 1 of 1	

IEEE 1394

IEEE1394 Cable Assemblies
Cables and Adaptors


for more information call
01344 304123

Specifications

IEEE Receptacle x 2 (1x6P, 1x4P)
6P overmoulded grey
4P assembled black



Cable Specification UL20276
2 x pair 28 AWG
Cable OD 3.5 mm ± 0.5 mm
Colour Grey PVC
Cable Length from 0.5 m to 4.5 m
Multishield - Aluminium Mylar Foil/Braid

Part Number: MFW45CN-Length in metres				
Description: IEEE 1394 Cable Assembly	Drawn: RL	Apr 99	Units: mm	
	Checked:	Rev: 02	Sheet 1 of 1	

IEEE 1394

IEEE1394 Cable Assemblies
Cables and Adaptors

for more information call
01344 304123

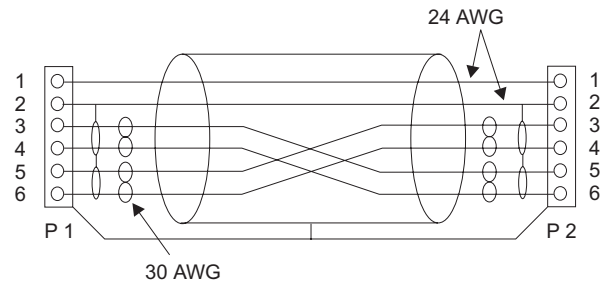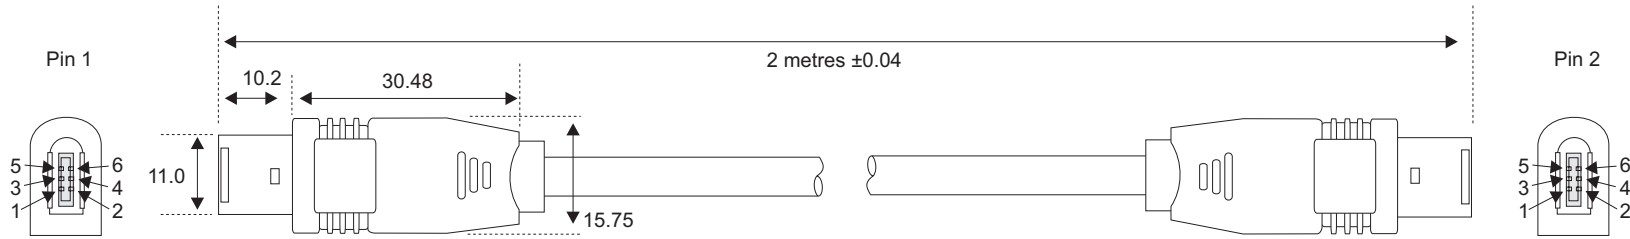

Specifications

- IEEE Receptacle x 2 (6P) overmoulded
- Cable Specification UL20276
- 2 x pair 28 AWG
- 2 x 24 AWG
- Cable OD 5.9 mm ± 0.5 mm
- Colour Grey PVC
- Cable Length from 0.5 m to 4.5 m
- Multishield - Aluminium Mylar Foil/Braid

Part Number: MFW55AN-Length in metres			
Description: IEEE 1394 Cable Assembly	Drawn: RL		
	Checked:	Rev: 02	Sheet 1 of 1