
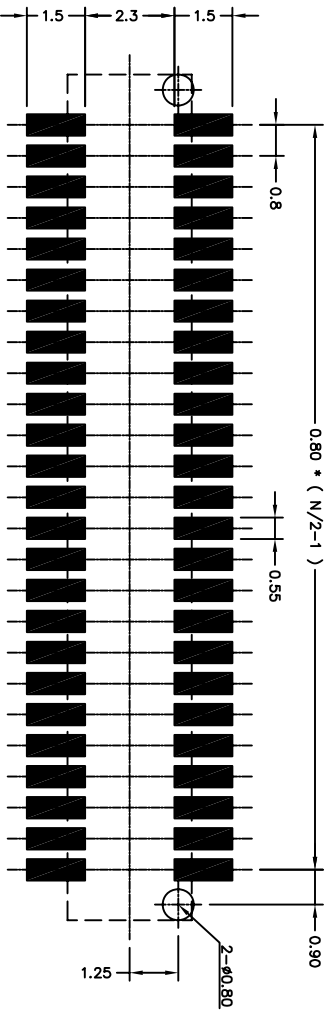
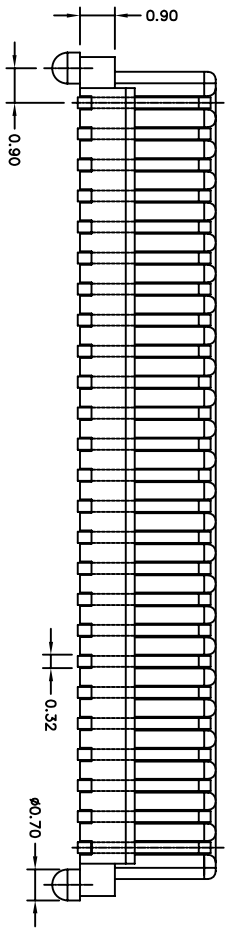



REV.	DESCRIPTION	DATE
A	RELEASE	08/21/1997

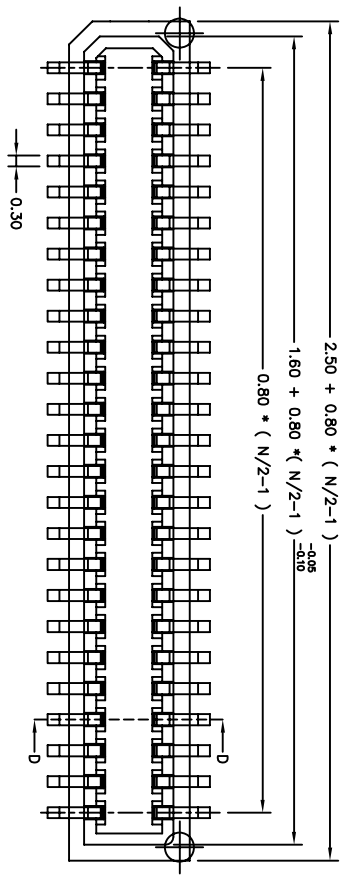

NOTE

- A. Material:
1. Housing : HTN or LCP,UL 94V-0,Black
 2. Contact : Phosphor Bronze
 3. Plating : Gold Plating.
- B. Temperature: -20 to +105°
- C. Electrical:
1. Voltage : 50V.
 2. Current : 0.5A.
 3. Contact Resistance : 40m Ω max.
 4. Dielectric Withstanding Voltage : 500V AC / 1 min.
 5. Insulation Resistance : 100M Ω min.

PCB Layout For
Surface Mounting

ROHS COMPLIANT

DRAWER Chin Chun Liu		 GTK UK LTD.
CHECK HqW Feng Liu		
DESIGNED Chin Chun Liu		NAME 0.80mm (0.031") Pitch Board To Board Male connector H=3.55mm
APPROVAL HqW Feng Liu		
DATE 08/21/1997		DRAW NO. BTB-08P-AXXX
SCALE 6 : 1		SHEET 1 OF 1
SIZE A4		REV. A

TOLERANCE	
.X	±0.250
.XX	±0.100
.XXX	±0.050
UNITS : mm	