
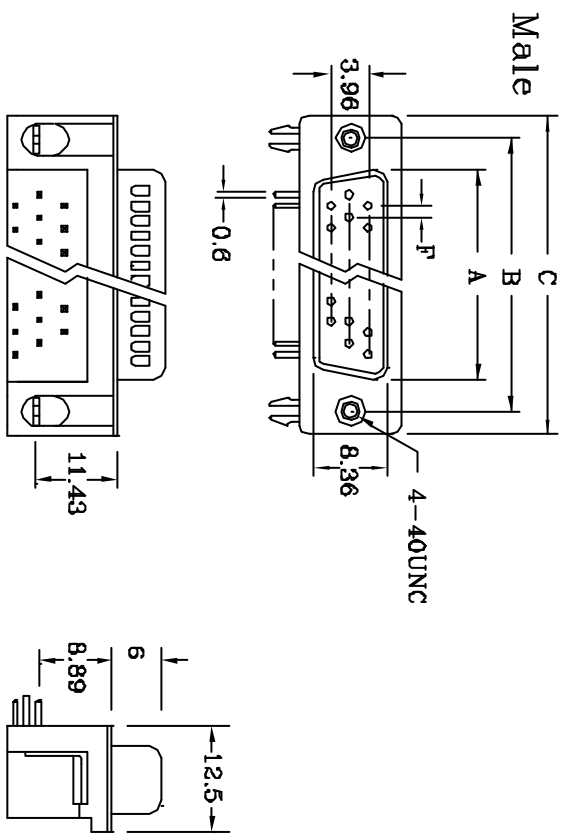


D-SUB HIGH DENSITY RIGHT ANGLE TYPE

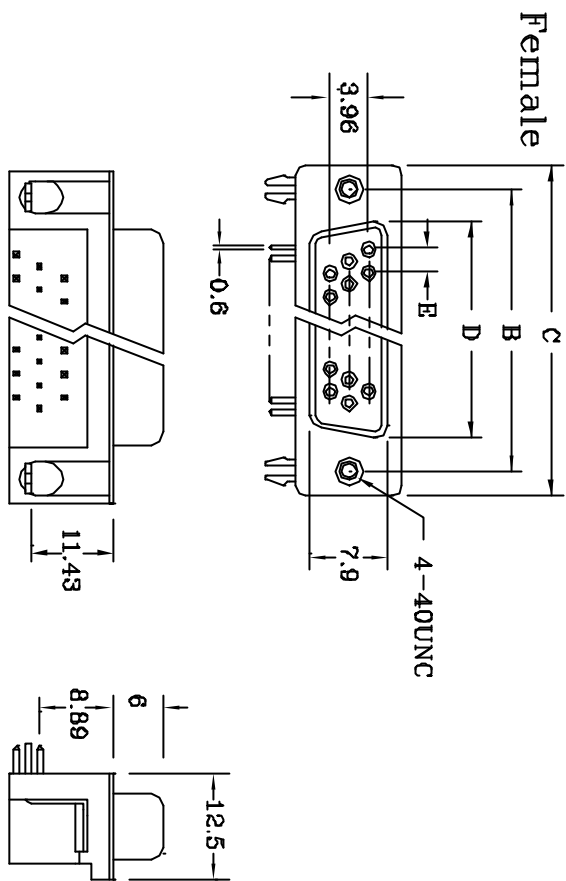

Specifications:

Contact Resistance: 30mΩ max. at DC 100mA

Insulator Resistance: 1000M Ω min. at DC 500V

Current Rating: 3 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute


Operating Temperature: -55 °C ~ +105 °C

Contact: Brass or Phosphor Bronze

Housing: PBT & 30% Glass Fiber (UL 94V-0)

Position	Dimension					
	A±0.25	B±0.13	C±0.5	D±0.25	E±0.05	F±0.05
15	16.92	24.99	30.8	16.33	2.29	1.145
26	25.25	33.32	39.1	24.66	2.29	1.145
44	38.25	47.04	53.0	38.38	2.29	1.145
62	55.42	63.50	69.3	54.84	2.41	1.205

PART-NO: HDL***TB*NS/99		APPROVALS		DATE	
DESCRIPTION:		DRAWN Tao.Tao.		12/07/99	
DWG NO. 150		SCALE		CHECK	
CATALOG NO.			PAGE		



億群電氣股份有限公司
GOLD-TEK ELECTRIC CO., LTD.