
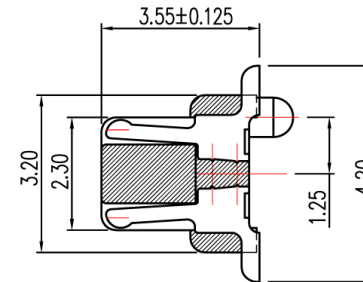


RoHS Compliant

REV.	DESCRIPTION	DATE
△	加註可製Pin數範圍	2013 / 12 / 18

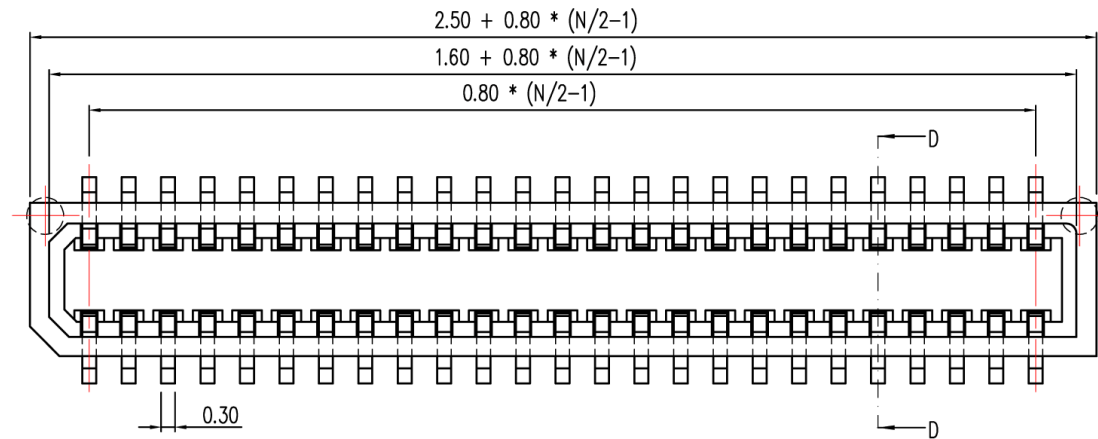

D-D

NOTES

A. Material:

1. Housing: Nylon 9T Halogen Free  
UL94V-0, black

2. Contact: Copper Alloy

B. Plating: gold

C. Temperature:  $-20^{\circ}$  to  $+105^{\circ}\text{C}$

D. Electrical



1. Voltage: 50V

2. Current: 0.5A

3. Contact Resistance:  $40\text{m } \Omega$  max.

4. Dielectric Withstanding Voltage:  
500V AC/1 min

5. Insulation Resistance:  $100\text{M } \Omega$  min.

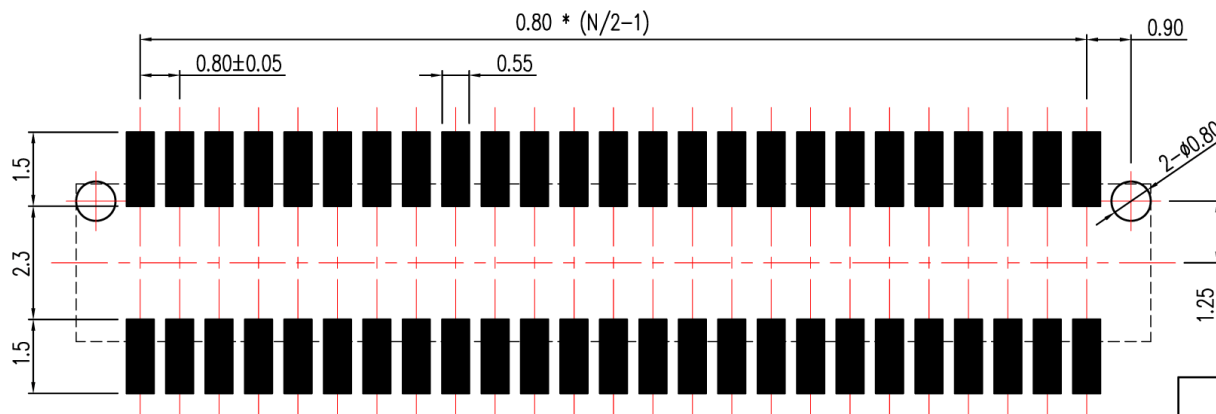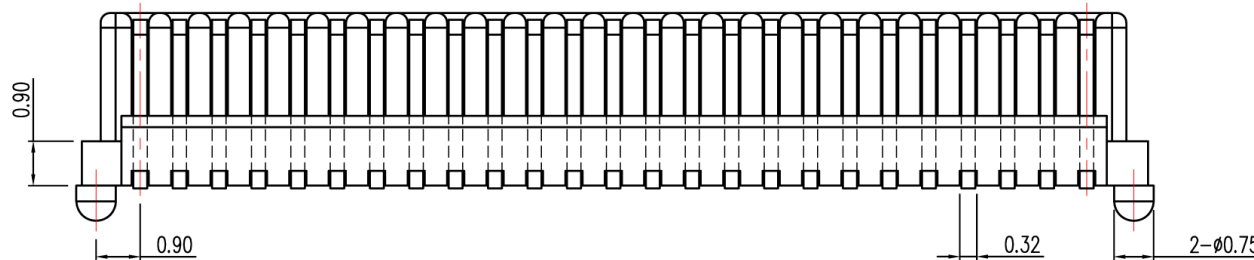


PCB Layout For  
Surface Mounting

ORDER CODE:

**BB80 XX MG355-TR-R**

No Positions:  
10 (2x5) - 100 (2x50)

Package  
TR - tape & reel with mylar

TOLERANCE .X $\pm 0.25$ .XX $\pm 0.10$ .XXX $\pm 0.05$	DRAWER <i>Chin Chun Liu</i>	 <b>GTK UK LTD.</b>
	CHECK <i>Haw Feng Liu</i>	
	DESIGNED <i>Chin Chun Liu</i>	NAME 0.8mm pitch Microstak; male connector for all board-to-board stack height options
	APPROVAL <i>Haw Feng Liu</i>	PART NO. BB80xxMG355-TR-R
UNITS : mm	DATE 10/30/2013	SHEET 1 of 1
SCALE 6 : 1	SIZE A4	REV. A