

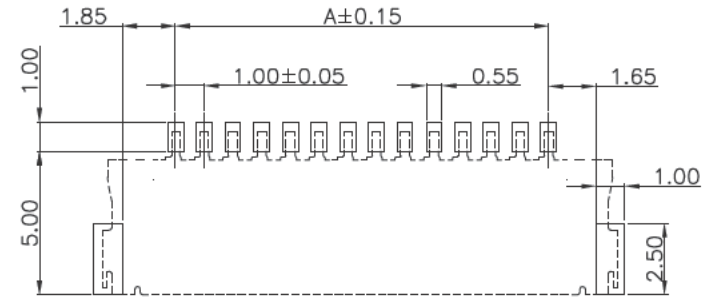
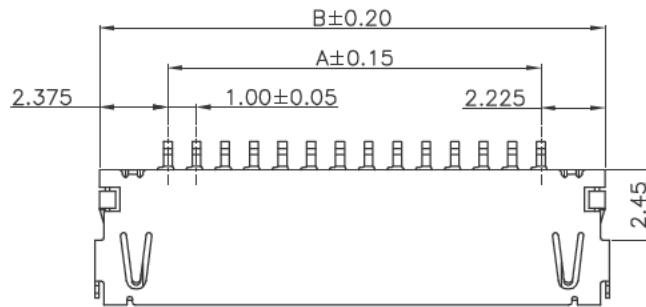


REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/0		RELEASE TO PRODUCTION	11/04/11	Paul
C/1		AMEND P/N	05/10/12	Paul

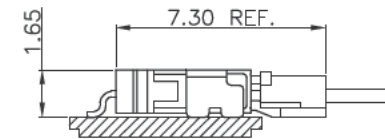

P.C.B. Layout



Mating Condition (REF.)

Pin	DIM. (mm)	
	A	B
08	7.00	11.60
14	13.00	17.60
20	19.00	23.60
30	29.00	33.60

NOTES:

1. MATERIAL:

INSULATION : NYLON 9T, UL94V-0 (BLACK)

CONTACT: PHOSPHOR BRONZE

SHELL: PHOSPHOR BRONZE / SOLDER AREA GOLD

FLASH OVER NICKEL



2. CONTACT FINISH: GOLD FLASH OVER NICKEL

3. PACKAGING: TAPE & REEL

4. ORDER CODE:




WB1.0H-xxSMH1G-R

xx = No of contacts

TOLERANCE		APPROVALS		DATE	 <b>GTK UK LTD.</b>		PART NO. WB1.0H-xxSMH1G-R	TITLE: WIRE TO BOARD, RECEPTACLE, PITCH 1.00mm, RIGHT ANGLE, SMT TYPE, ASSEMBLY
X.	±0.30	DRAWN	<i>Thou wen wu</i>	05/10/12'				
X.X	±0.25	CHK'D	<i>Paul Chen</i>	05/10/12'	DRAWING NO. WB1.0H	 SHEET 1 OF 2	REV. C/1	
X.XXX	±0.08	APP'D	<i>Wayne Lai</i>	05/10/12'				
ANGULA	3'	UNLESS OTHERWISE SPECIFIED		UNITS mm	SCALE 1:1	SIZE: A4		

REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/0		RELEASE TO PRODUCTION	11/04/11'	Paul
C/1		AMEND P/N	05/10/12'	Paul


PULL OUT DIRECTION

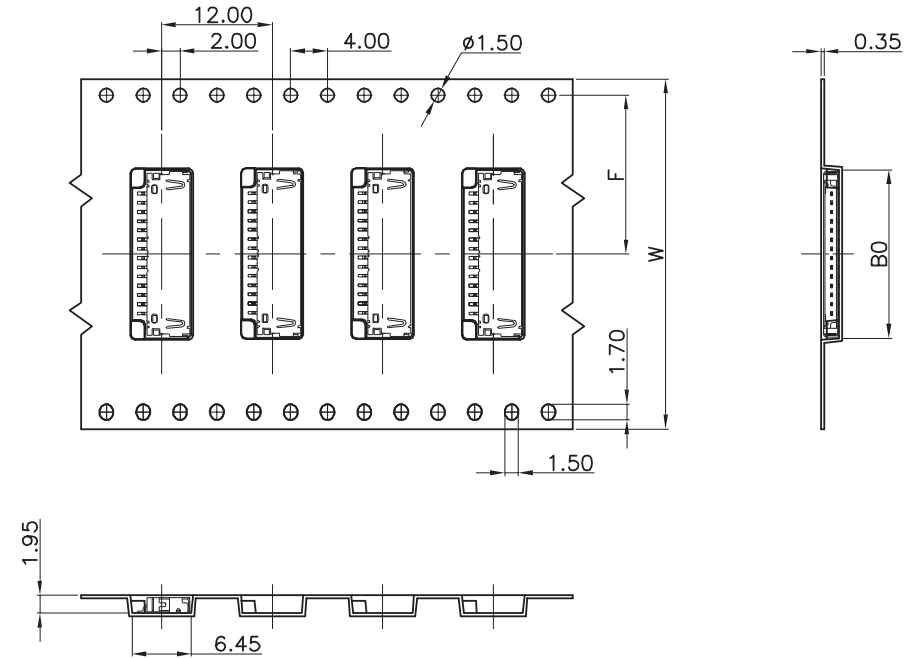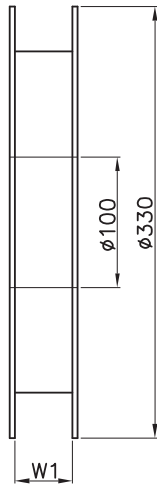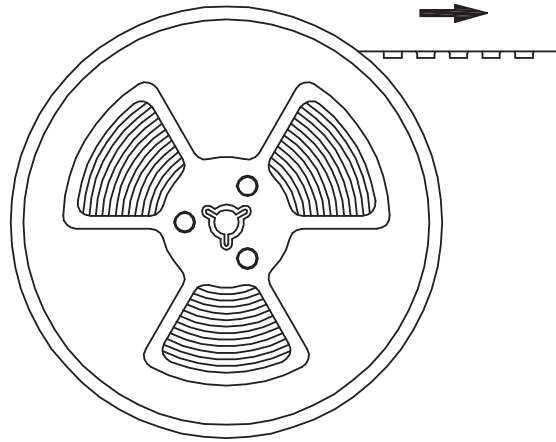

PIN	DIM. (mm)			
	B0	F	W	W1
08	12.25	14.25	32.00	32.50
14	18.25	14.25	32.00	32.50
20	24.25	20.25	44.00	44.50
30	34.25	20.25	44.00	44.50

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.20$  .
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm.
3. MATERIAL : TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
4. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
5. THICKNESS :  $0.35 \pm 0.05$ mm.
6. COMPONENT LOAD PER 13" REEL : 1000 PCS.

TOLERANCE		APPROVALS		DATE	 <b>GTK UK LTD.</b>	
X.	$\pm 0.30$	DRAWN				
X.X	$\pm 0.25$	CHK'D		05/10/12'		
X.XX	$\pm 0.15$	APP'D		05/10/12'	DRAWING NO. WB1.0H SHEET 2 OF 2	
X.XXX	$\pm 0.08$	UNITS mm		05/10/12'		
ANGULA	3'	SCALE	1:1	SIZE: A4	REV. C/1	
UNLESS OTHERWISE SPECIFIED						