
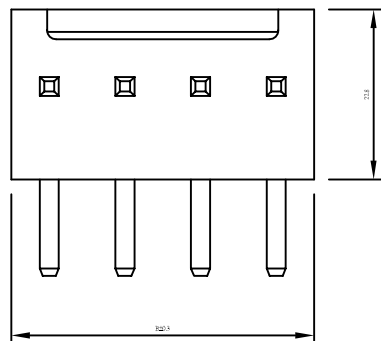
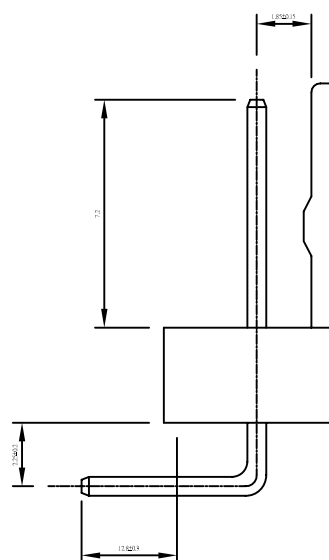


Recommend PCB Layout

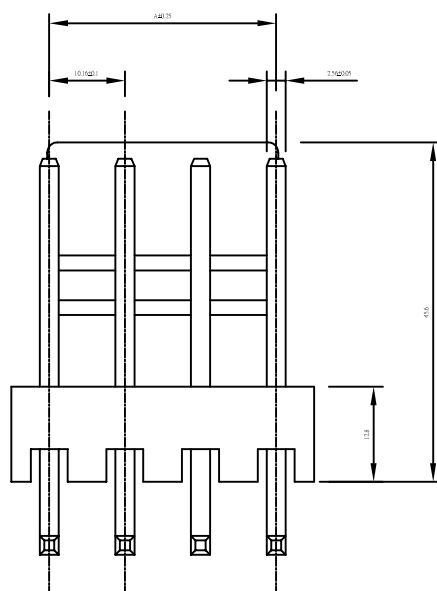

RoHS COMPLIANT

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000M Ω min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20m Ω max

■ WAFER

- Part No. : 2500-XX-RTR-R
- PolesN : 2-15
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
- Q' ty : 1000 pcs./Bag

Poles	Part No.	Dimensions(mm)	
		A	B
2	2500-02-RTR-R	2.54	5.08
3	2500-03-RTR-R	5.08	7.62
4	2500-04-RTR-R	7.62	10.16
5	2500-05-RTR-R	10.16	12.70
6	2500-06-RTR-R	12.70	15.24
7	2500-07-RTR-R	15.24	17.78
8	2500-08-RTR-R	17.78	20.32
9	2500-09-RTR-R	20.32	22.86
10	2500-10-RTR-R	22.86	25.40
11	2500-11-RTR-R	25.40	27.94
12	2500-12-RTR-R	27.94	30.48
13	2500-13-RTR-R	30.48	33.02
14	2500-14-RTR-R	33.02	35.56
15	2500-15-RTR-R	35.56	38.10



GTK UK LTD.

PART NUMBER

2500-XX-RTR-R

REVISION	01	SCALE	1:1	DATE	06.30.03
CHECK	SANDY	UNIT	mm	NAME	YANG