

2510 Series

FEATURES:


- 2-20 Circuits
- With locking ramp
- Nylon [UL 94V-0]
- Mates with .025"[0.64mm] pins
- Accepts double cantilever crimp terminal [2510HP-T]
- Terminal retention to housing 6.6lbs [3.0Kg] minimum

SPECIFICATIONS:

- Current rating: 3A AC. DC
- Voltage rating: 250V AC. Maximum
- Temperature range: -40°C ~ +105°C .
- Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- Insulation resistance: 1000 MΩ min
- Withstand voltage: 1500V AC/minute
- Applicable wires: AWG #30 ~ #22

PIN	Dim.A	Dim.B
02	5.60	2.54
03	8.14	5.08
04	10.68	7.62
05	13.22	10.16
06	15.76	12.70
07	18.30	15.24
08	20.84	17.78
09	23.38	20.32
10	25.92	22.86
11	28.46	25.40

PIN	Dim.A	Dim.B
12	31.00	27.94
13	33.54	30.48
14	36.08	33.02
15	38.62	35.56

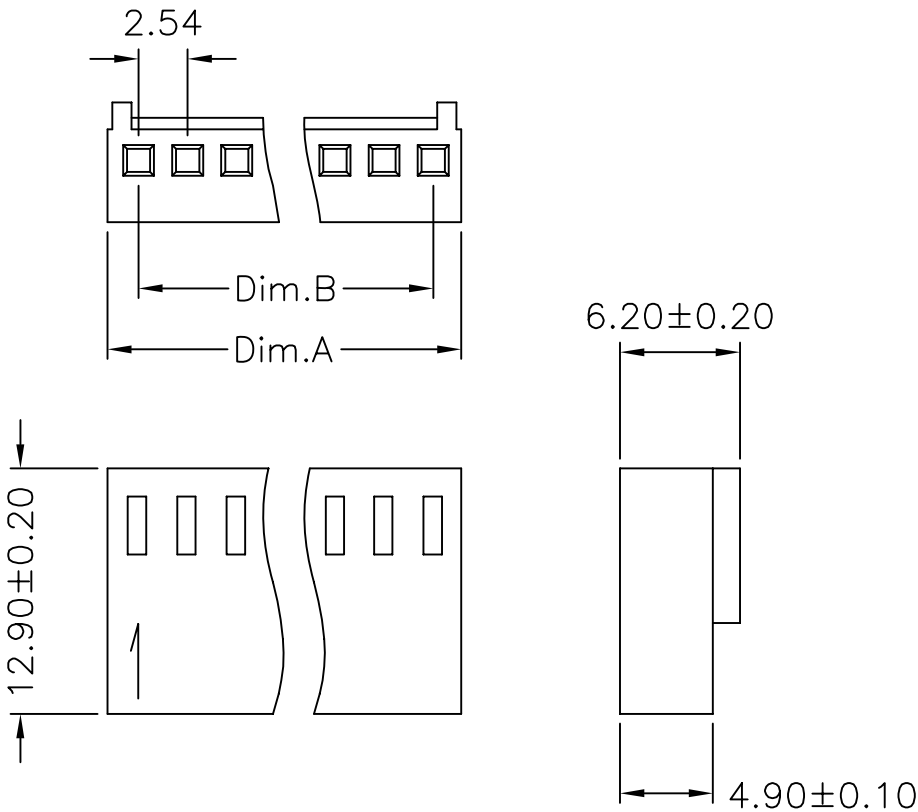

RoHS COMPLIANT

TITLE:	CUSTOMER APPROVAL	REVISION				DRAWN:	 GTK UK LTD.						
		REV.	DESCR.	DATE	SIGN								
P/N:						CHECKED							
2510-XX-R						APPROVED		DATE	2002.12.05	SCALE		UNIT	MM