

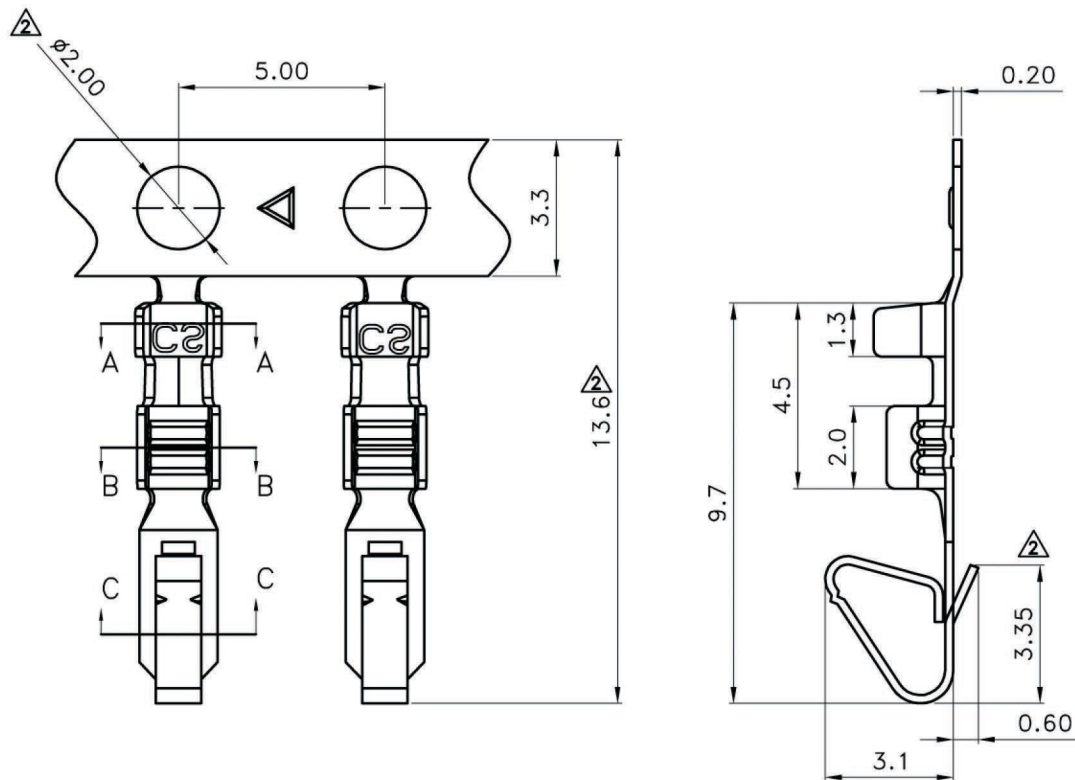


A-A SEC




B-B SEC



C-C SEC

## SPECIFICATIONS

- Current Rating : 3A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000M  $\Omega$  min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20m  $\Omega$  max
- Applicable Wires : AWG # 22 - 28
- Material : Tin plated brass
- Thickness : 0.2 mm
- Q' ty : 10000 pcs./Reel

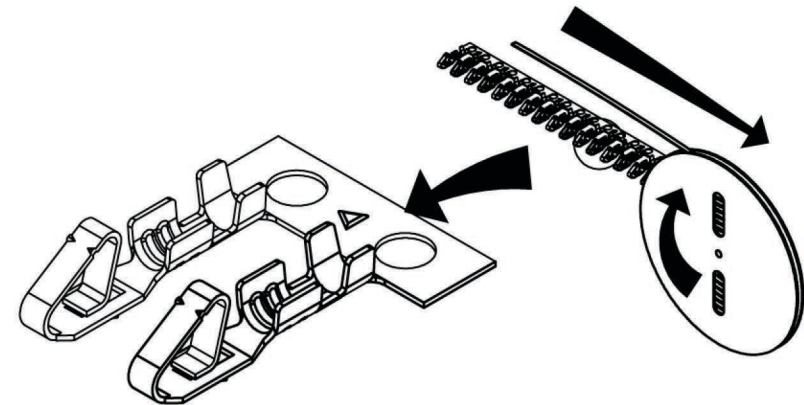

**gtk** GTK UK LTD.

PART NO 2510T-R

2.54mm Crimp Style Connectors Terminal

| APPROVED BY | SCALE      | UNIT    | TOLERANCE | LTR   | REVISION RECORD | NAME | DATE | LTR            | REVISION RECORD | NAME | DATE |
|-------------|------------|---------|-----------|-------|-----------------|------|------|----------------|-----------------|------|------|
| 張育瑞         |            | mm      | .0        | ±0.30 | △               |      |      | △              |                 |      |      |
| CHECKED BY  | PROJ       | VER NO. | .00       | ±0.20 | △               |      |      | △              |                 |      |      |
| 黃科源         |            | a2      | .000      | ±0.10 | △               |      |      | △              |                 |      |      |
| DRAWN BY    | DATE       | SIZE    | ANGLE     |       | △               |      |      | CUSTOMER       |                 |      |      |
| 劉怡萱         | 2011/04/06 | A4      | 0°        | ±1°   | △               |      |      | ROHS COMPLIANT |                 |      |      |
|             |            |         | .0°       | ±     | △               |      |      |                |                 |      |      |
|             |            |         | SHEET     | 1/1   | △               |      |      |                |                 |      |      |