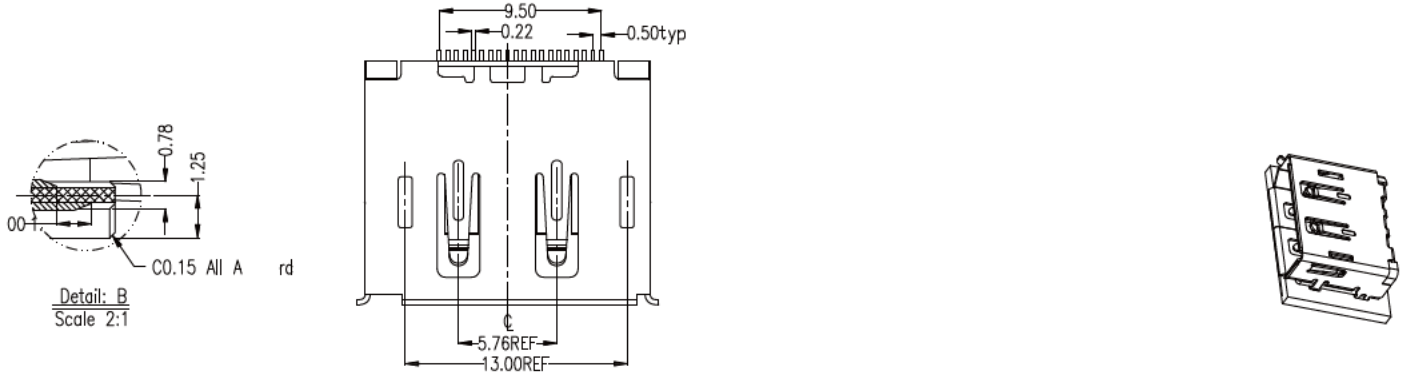



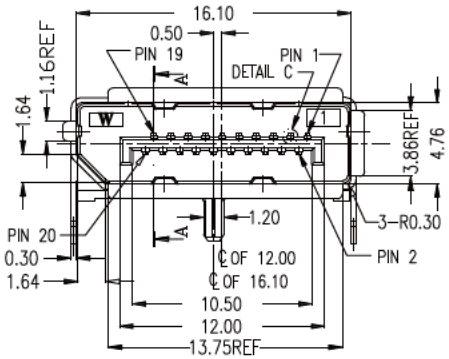

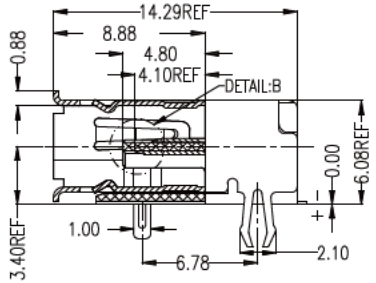

SECT A-A

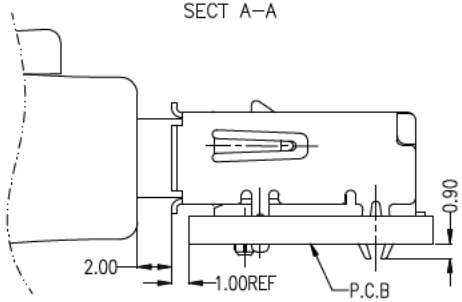

Fully mated condition

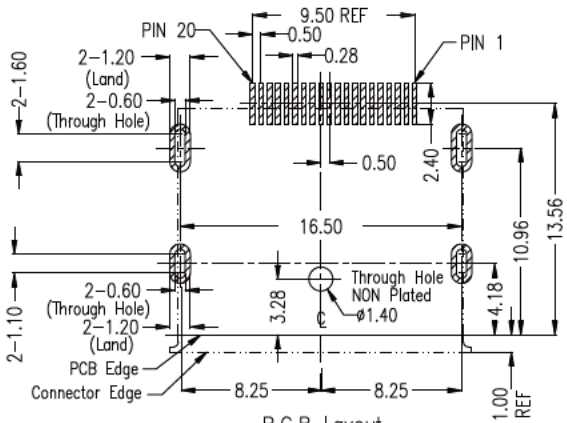

P.C.B Layout

NOTES:

*Material

Body: LCP, UL 94V-0 Rated; Color: Black.
Shield: Brass.
Plating: Nickle Plating .
Contact: Brass.
Plating: Tin Plating On Solder Tail. 30µ"
Gold Plating Over Nickel on Contact Area;

*Electrical Specification

Operation Voltage: 40 VAC max.
Current Rating: 0.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 100 Megohms min.
Dielectric Withstanding Voltage: 500 VDC

*Environmental

Operating Temperature: -20°C to +85°C

DIMENSIONS TOLERANCE METRIC .0=±0.30 .00=±0.20 .000=±0.10 ANG.=±2°	單位(UNITS)	MM	處理(FINISH)	SEE NOTE	審校(CH'K)	Calvin	圖名(NAME) DISPLAY PORT RECEPTACLE, R/A PCB MOUNT; NO FLANGE		GTK UK LTD.					
	數量(QT'Y)	N/A	繪圖(DRAW)	Johnson	核准(APP'D)	Selena	料號(PART NUMBER)	DPT-R1HNG2P-R						
	材料(MT'L)	SEE NOTE	設計(DE'N)	Mike	日期(DATE)	OCT.15.2007	圖號(DRAW NUMBER)	T002	比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	A
							圖檔(FILE NAME .DWG)							