RevNo	Item	Date	Signature	Checked
X1	Change material	20110323	Eric_Lin	

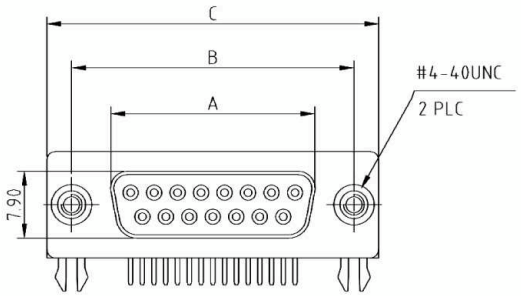



RoHS Compliance
2002\95\EC

ORDER CODE:

DXLXXSBTK2NSE-R

Shell Size + N° positions:

DEL09
DAL15
DBL25
DCL37

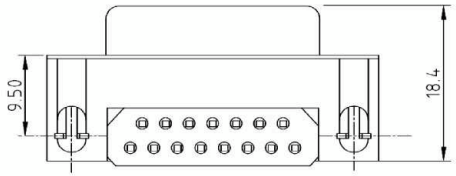

Note

No.	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32

ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.
Dielectric Withstanding Voltage:AC 500V at sea level.
Insulation Resistance:1000Megohms Min.
Contact Resistance:30Milliohms Max.
Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.
Insulator:PBT.Gold Plated,Black
Shell: SPCC.Tin Plated
Z-Piece: Fe.

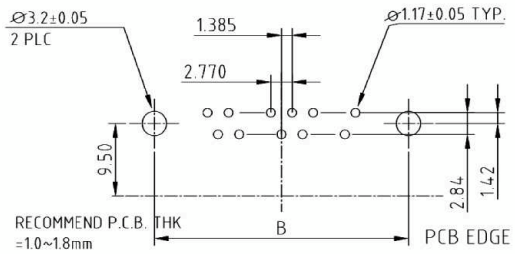

DRAW.BY	Eric_Lin	DATE	2005-10-10	UNIT	MM	TOLERANCE UNSPECIFIED	.X ±0.30 .XX ±0.25 .XXX ±0.150 Ang. ±2°	GTK UK LTD.	DRAWING NO: D-Sub R/A Female with EMI filter ; 8.08mm footprint
APPVL.BY		VERSION	A	SCALE		DWG.No.	F:/XX/ / +		PART No. DXLXXSBTK2NSE-R
									CUSTOMER