

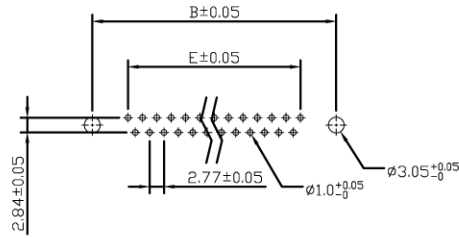
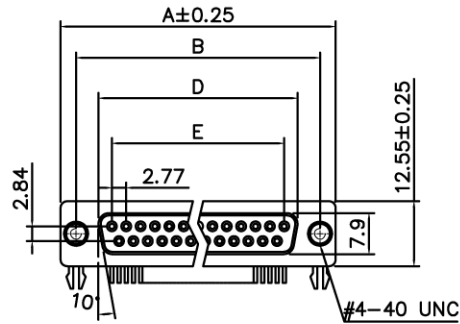


RoHS COMPLIANT

REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE



RECOMMENDED PCB LAYOUT
FEMALE\MALE

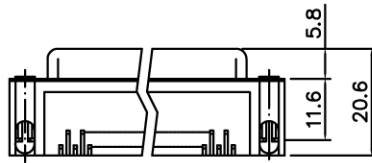

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

Shell : Steel, 100u" Tin Over 50u" min Copper

Clinch Nut : Copper alloy, Nickel Plated.

Boardlock : Steel, Tin Plated.

Electrical

Contact Resistance : 20 milliohms

Insulation Resistance : 1000
megohms at 500 VDC

Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3AMP

Volatge Rating : 250 VAC/rms 60Hz

ORDER CODE;

DxLxxSDTK1NS-R

Shell size & No positions;

DEL09 - 9 pos

DAL15 - 15 pos

DBL25 - 15 pos

DCL37 - 37 pos

Dimensions

Positions	A	B	D	E
9	30.81	24.99	16.33	11.08
15	39.20	33.30	24.70	19.39
25	53.05	47.04	38.40	33.24
37	69.40	63.50	54.80	49.86

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [MM] <input checked="" type="checkbox"/> MM ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE DRAWN BY AND DATE JUSTIN XING 10-12-06			
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES .X ±0.38 [0.015] X° ±3° .X ±0.25 [0.010] .X° ±1.0° .XX ±0.13 [0.005]		CHECKED BY AND DATE JUSTIN XING 10-12-06 APPROVED BY AND DATE KING CHIU 10-12-06 THIRD ANGLE PROJECTION		TITLE R/A D-SUB RECEPTACLE WITH 10.3MM FOOTPRINT; 4-40UNC THREADED INSERTS & BOARDLOCKS	
MATERIAL				DRAWING NO. DxLxxSDTK1NS-R	
FINISH		SCALE: 1 : 1 SIZE: A3		REV A	
FILE NO.:				SHEET 1 OF 1	

DO NOT SCALE DRAWING