

ORDER CODE;

DxxXPTWINGS-R

Shell size & No positions

- E09 - 9 pos
- A15 - 15 pos
- B25 - 15 pos
- C37 - 37 pos




SPECIFICATION

Current Rate : 3Amps.
 Insulation Resistance: 1000Megohms Minimum
 at 500V DC.

Dielectric Strength: 500V Per minute.
 Operation Temperature: -55°C to +105°C.
 Contact Resistance: 35 Milliohms Maximum.

MATERIALS

Contact: Copper Alloy (gold flash on entire contact)
 Insulator: Nylon (white)
 Shell: SPCC.

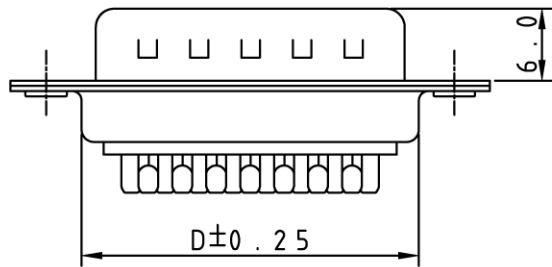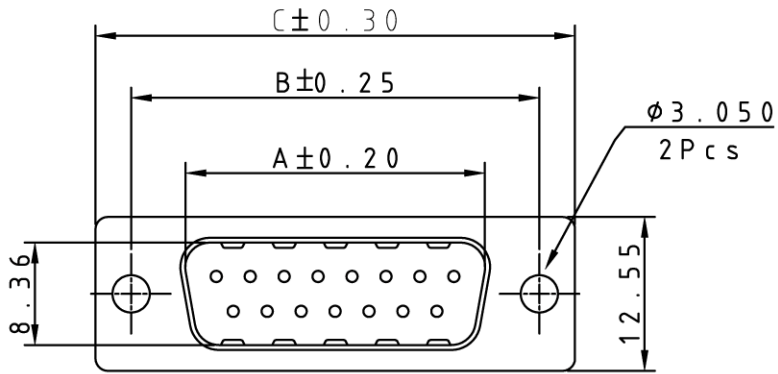

No.	A	B	C	D
09	16.92	24.99	30.81	19.23
15	25.25	33.32	39.14	27.56
25	38.96	47.04	53.04	41.28
37	55.42	63.50	69.32	57.33

DRAW. BY	LinHaiFong	DATE	12-Jan.-2002	UNIT	MM	TOLERANCE	.X ±0.30 ANG: ±2° .XX ±0.25 .XXX ±0.130
APPVL. BY		VERSION	A	SCALE	Free	DWG. No	F: /XX/DS/ +

 **GTK UK LTD.**

ITEM	D-SUB MALE SOLDER
PART No.	DxxXPTWINGS-R
CUSTOMER	