



RoHS COMPLIANT


REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A			ELTON MENG	2006-11-01

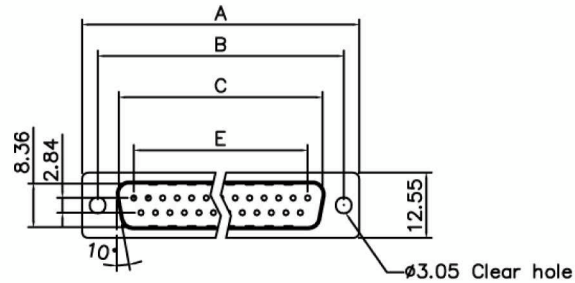


Cover

Product Specification
 Material
 Insulator : Glass-Filled Thermoplastic PBT, UL94V-0
 Contact : Copper alloy
 Shell : Steel, 100u" Tin Over 50u" min Copper

Electrical
 Contact Resistance : 20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance : 1000
 megohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3 AMP
 Voltage Rating : 250 VAC/rms 60Hz

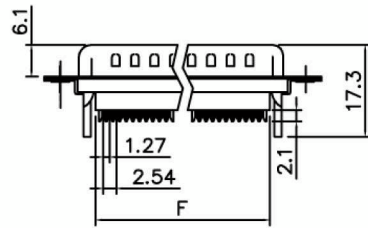

Without Insulator Support



Strain Relief

ORDER CODE:

FDXXXXMI-R

Shell+No positions

GENDER

E09

P=Plug

A15

S=Socket

B25

C37

Dimensions

Positions	A	B	C	E	F
9	30.81	24.99	16.92	11.08	13.10
15	39.20	33.30	25.25	19.39	20.70
25	53.04	47.04	38.96	33.24	33.68
37	69.40	63.50	55.42	49.86	50.30

DIMENSIONS: <input type="checkbox"/> mm [INCH] <input type="checkbox"/> INCH [mm] <input checked="" type="checkbox"/> mm ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES X. ±0.38 [0.015] X* ±3° .X ±0.25 [0.010] .X* ±1.0° .XX ±0.13 [0.005]		DRAWN BY AND DATE JUSTIN XING 11-01-06	
MATERIAL		CHECKED BY AND DATE JUSTIN XING 11-01-06	
FINISH		APPROVED BY AND DATE KING CHIU 11-01-06	
		THIRD ANGLE PROJECTION 	
		SCALE: 1 : 1	SIZE: A3



TITLE
 D-SUB IDC type with strain relief
 and standard mounting holes

DRAWING NO. FDXXXXMI-R	REV A
FILE NO.:	SHEET 1 OF 1

DO NOT SCALE DRAWING