




RoHS COMPLIANT

REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A				

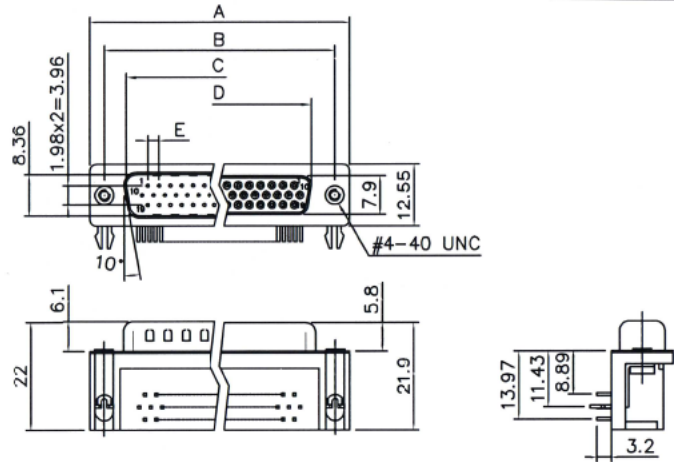


Dimensions

Positions	A	B	C	D	E
15	30.81	24.99	16.92	16.33	2.29
26	39.20	33.30	25.25	24.70	2.29
44	53.05	47.04	38.96	38.40	2.29
62	69.40	63.50	55.42	54.80	2.41

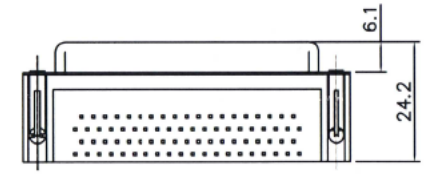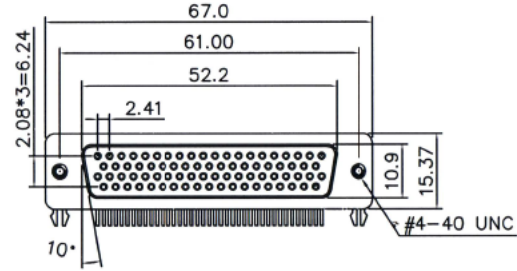

78 Positions



Product Specification

Material
 Insulator :Glass-Filled Thermoplastic PBT,UL94V-0 rated, Black
 Contact :Brass ,Full Gold PLATING
 Shell : Steel, 100u" Tin Over 50u" min Copper
 Clinch Nut: Brass, 100u" min Nickel Plated.
 Boardlock :Brass, 100u" min Tin Plated
 Screwlock :Brass, 100u" min Nickel Plated.

Electrical

Contact Resistance :20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance :1000
 megohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating :3 AMP
 Volatge Rating :250 VAC/rms 60Hz

DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [MM] <input checked="" type="checkbox"/> MM ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES .X ±0.38 [0.015] X° ±3° .X ±0.25 [0.010] .X° ±1.0° .XX ±0.13 [0.005]		CHECKED BY AND DATE JUSTIN XING 07-03-06	
MATERIAL		APPROVED BY AND DATE KING CHIU 07-03-06	
FINISH		THIRD ANGLE PROJECTION	
SCALE: 1 : 1		SIZE: A3	

GTK UK Ltd	
TITLE HIGH DENSITY D-SUB RECEPTACLE WITH BOARDLOCKS AND 4-40UNC THREADED INSERTS	
DRAWING NO.	REV
HDLxxSTK2NS-R	A
FILE NO:	SHEET 1 OF 4