


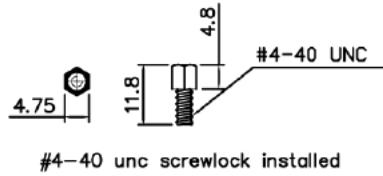






RoHS COMPLIANT

REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A			KING CHIU	2006-08-19

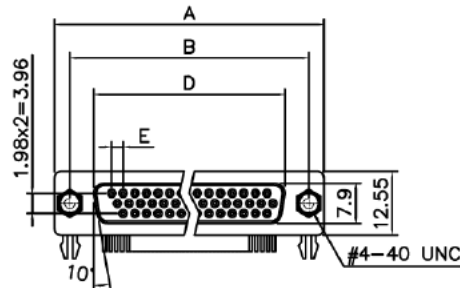

Dimensions

Positions	A	B	D	E
15	30.81	24.99	16.33	2.29
26	39.20	33.30	24.70	2.29
44	53.05	47.04	38.40	2.29
62	69.40	63.50	54.80	2.41

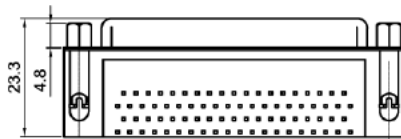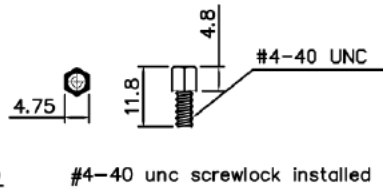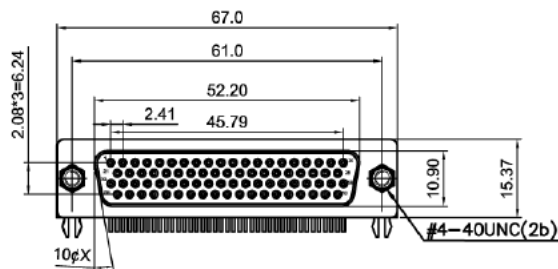

78 Positions

Product Specification


Material

Insulator :Glass-Filled Thermoplastic PBT,UL94V-0 rated
 Contact :Copper alloy, **full gold plated** (black)
 Shell :Steel, 100u" Tin Over 50u" min Copper
 Boardlock :Steel, 100u" min Tin Plated.
 Screwlock :Steel, 80u" min Nickel Plated.


Electrical

Contact Resistance :20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance :1000 megohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating :3 AMP
 Voltage Rating :250 VAC/rms 60Hz


P.C.B LAYOUT PATTERN



15 POSITION FEMALE



26,44,62 POSITION FEMALE



78 POSITION FEMALE

Positions	G	H
15M/F	1.145	7.04
26M/F	1.145	6.88
44M/F	1.145	6.88
62M/F	1.205	7.00

DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> mm (INCH) <input type="checkbox"/> INCH (mm) <input checked="" type="checkbox"/> mm ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES X: ±0.38 [0.015] X*: ±3° .X: ±0.25 [0.010] X*: ±1.0° .XX: ±0.13 [0.005]		DRAWN BY AND DATE JUSTIN KING 06-13-06 CHECKED BY AND DATE JUSTIN KING 06-13-06 APPROVED BY AND DATE KING CHIU 06-13-06 THIRD ANGLE PROJECTION	
MATERIAL			
FINISH		SCALE: 1:1	SIZE: A3



TITLE
HIGH DENSITY D-SUB RECEPTACLE WITH BOARDLOCKS AND 4-40UNC SCREWLOCKS

DRAWING NO. HDLxxSTK2YS-R	REV A
FILE NO.	SHEET 1 OF 1