
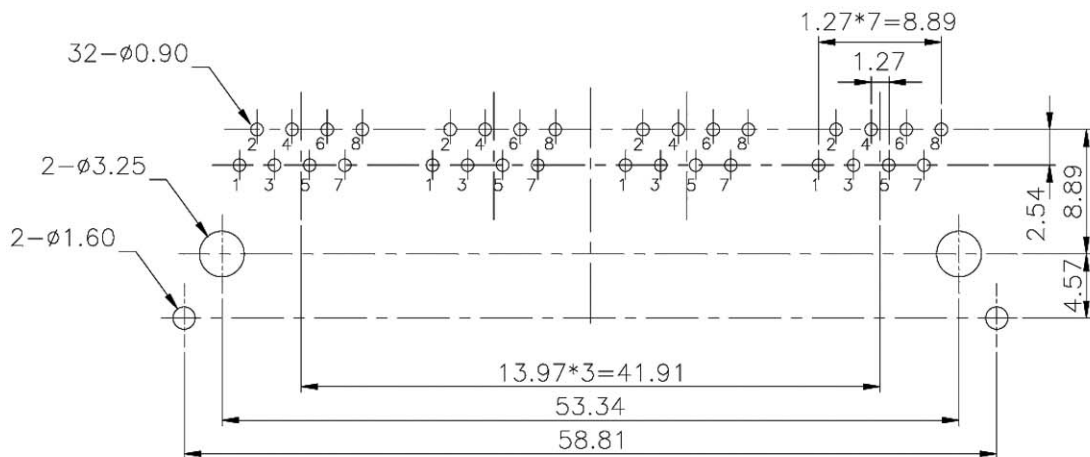


PCB LAYOUT/TOP VIEW





MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.(6u")
 TIN PLATING OVER NICKEL IN SOLDER AREA.
 SHIELDED: BRASS WITH NICKEL PLATED

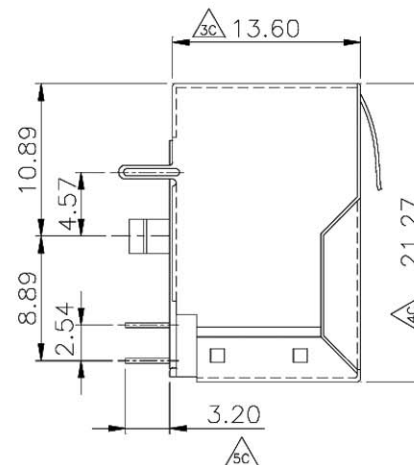

RoHS COMPLIANT

Available in 2-12 port configurations;
 contact GTK for other sizes

設計 DR. LILY 96-07-31	核准 APPD. Jerry 96-07-31	容許公差 TOLERANCE .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	品名 ARTICLE 1*4PORTS PCB JACK (8P8C插)
版本說明 REVISION NOTE		圖號 DWG NO. MTSG4-8810SB-R	單位 UNIT mm
 GTK UK LTD.			比例 SCALE 2.5/1
		張數 SHEET 1/1	版本 REV. A