



REV.	10	11	12
	SPECIFICATION		
		ECN NO.	APPD.



**Material:**

Housing: High Temperature Plastic UL94V-0, black

Contacts: Copper Alloy, gold plated

**Electrical Characteristics:**

Current Rating: 1 AMP.








Dielectric Withstanding Voltage: 500V AC 1 minute.

Insulator Resistance: 1000 MΩ min. at DC 500V.

Contact Resistance: 20 mΩ max. at DC 100 mA.

Operating Temperature: -40°C~+105°C.

**\*RoHS Compliant**

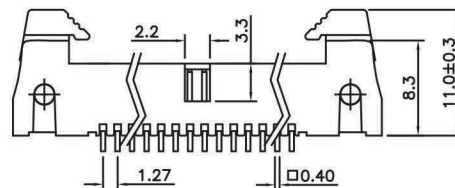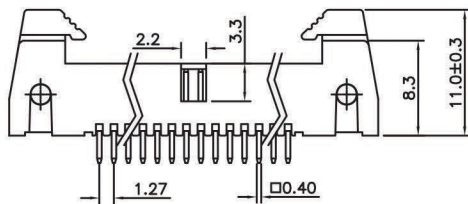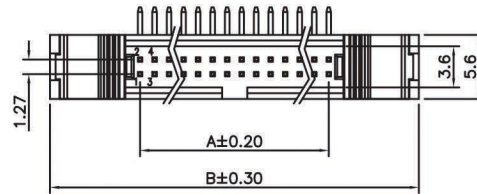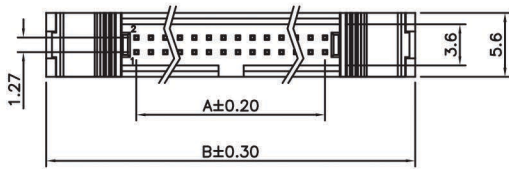

Position	Dimension	
	A	B
10	5.08	20.85
14	7.62	23.39
16	8.89	24.66
20	11.43	27.20
24	13.97	29.74
26	15.24	31.01
30	17.78	33.55
34	20.32	36.09
40	24.13	39.90
44	26.67	42.44
50	30.48	46.25
60	36.83	52.60

**Order Code:**

SCPxxGx2-S-R

S = Vertical

R = Right-angled

No. of positions (10 - 60)

Tolerances	Dwg. No.	3211D01002
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	ZJJ 11/15'11

Title:  
Box header 2.with ejectors  
1.27mmX1.27mm  
vertical or right-angled

**GTK UK LTD.**

P/N: SCPxxGx2-S-R

SHEET	1/1	Ver. No.	B1
-------	-----	----------	----