



REMARK: RoHS COMPLIANT

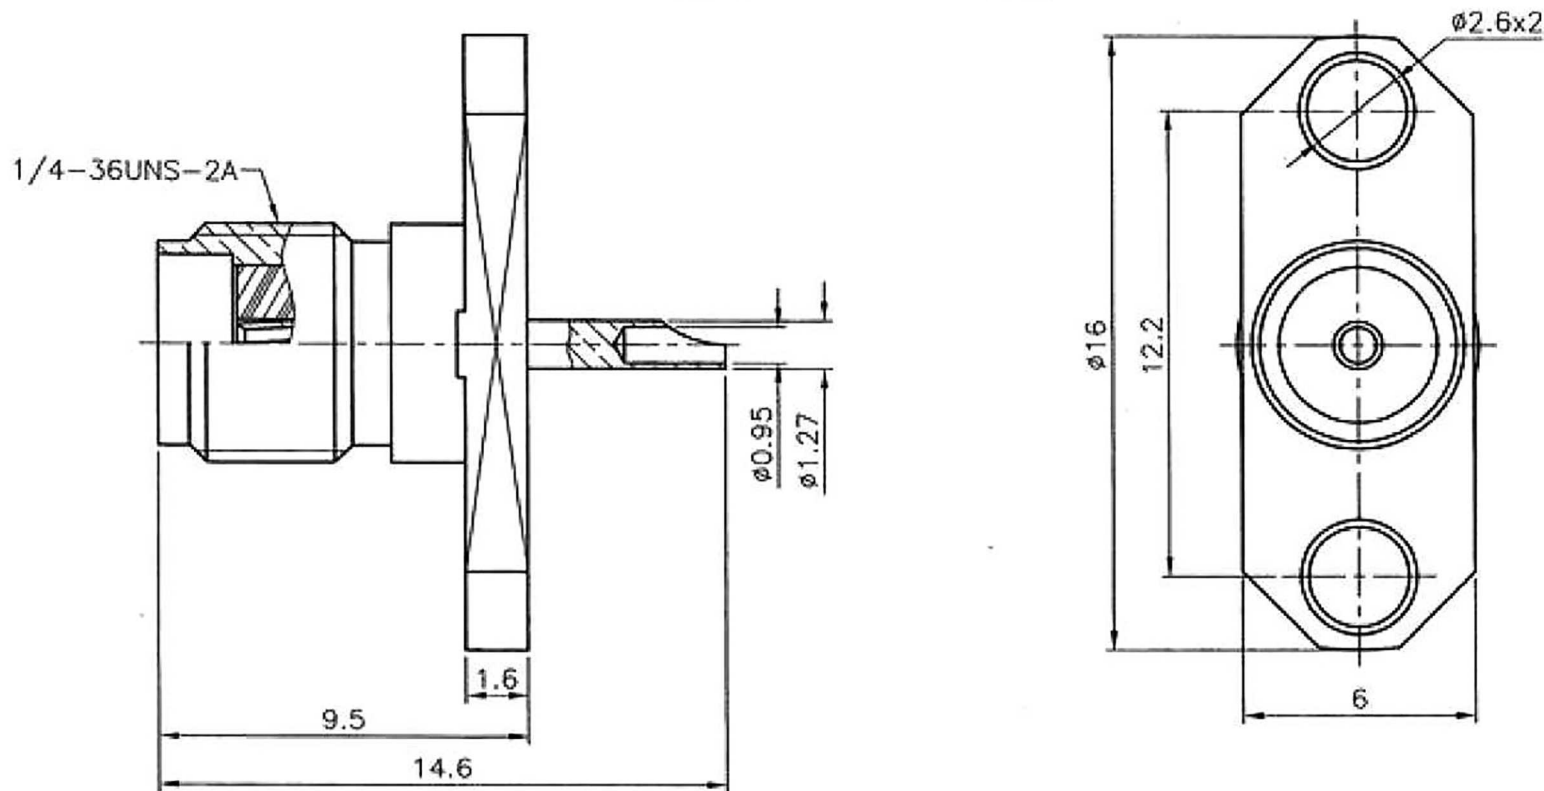

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530

					DIMENSIONS ARE IN MILLIMETERS			PART NO.		 GTK UK LTD.	
					UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)			APPROVED	DATE		
	LOCK RING	NOTE 1	NOTE 2		0.5~6	= ±0.2		<i>Ask</i>	08/14/06'	SMA PANEL RECEIPT JACK	
	INSULATOR	NOTE 4	WHITE		>6~30	= ±0.4					
	INSULATOR	NOTE 4	WHITE		>30~120	= ±0.8					
	CONTACT PIN	NOTE 5	NOTE 3		>120~315	= ±1		<i>Ask</i>	08/14/06'		
	BODY	NOTE 1	NOTE 2		>315~1000	= ±1.6					
					ANGLES(角度) = ±5'						DRAWING NO. SMA-P2S-50-R
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A1	<i>Ask</i>	08/14/06'