

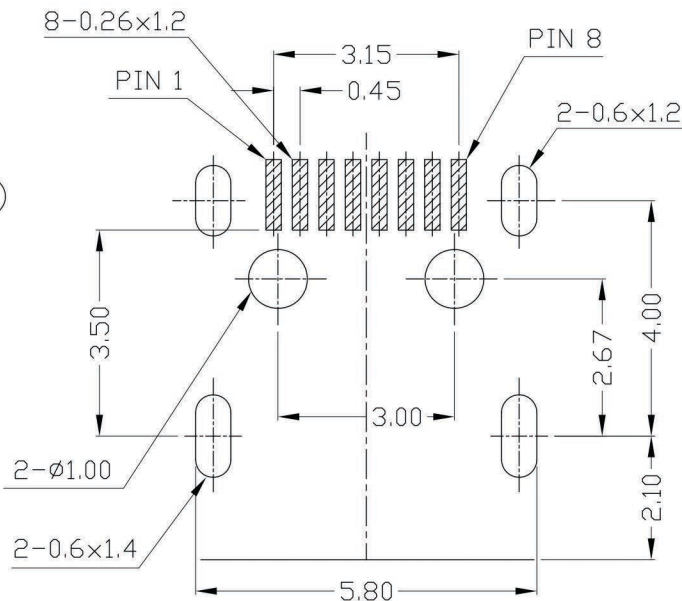
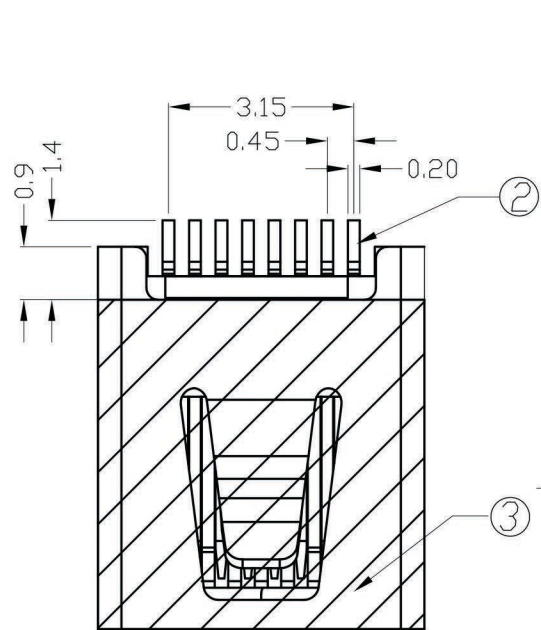


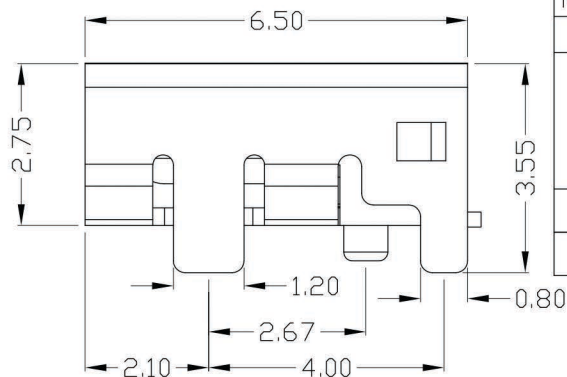

RECOMMENDED PCB LAYOUT

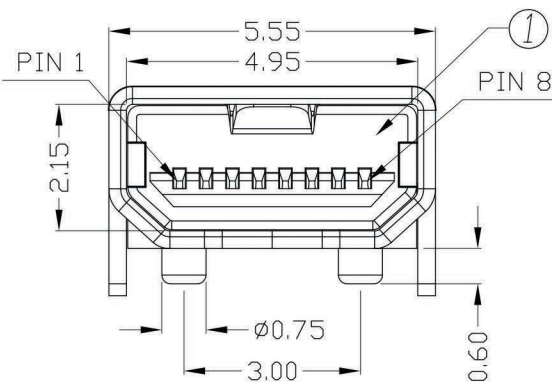

Specification:
Contact Resistance: 50m Ohm. Max.
Insulation Resistance: 100M Ohm Min. At 500VDC.
Rated Voltage And Current: 1A At 30VAC Minimum.
Dielectric Withstanding Voltage: 100V AC for 1 Minute
Insertion Force: 35 Newton Maximum.
Extraction Force: 3 Newton Minimum.
Durability (Life Test): 3000 Cycles

PACKING STYLE: TAPE REELING WITH MYLAT TAPE

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+ G.F.30%	BLACK	1	
2	PIN TERM.	PBS T:0.2	GOLD PLATED	8	Contact : Gold 15u" Other Area: Gold 1u"
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni: 80~120u"
4	MYLAR TAPE	MYLAR	YELLOW	1	

ROHS COMPLIANT



GTK UK LTD.

COMPUTER NO.

UNIT

SCALE

PART NAME

mm

1:1

MINI USB TYPE
8 PIN CONNECTOR SMT

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

MODEL

PAGE 1 OF 1

TINA

21-05-14

X. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05

USBS-8T4H-R

A0