


REV	ZONE	REVISION	DATE

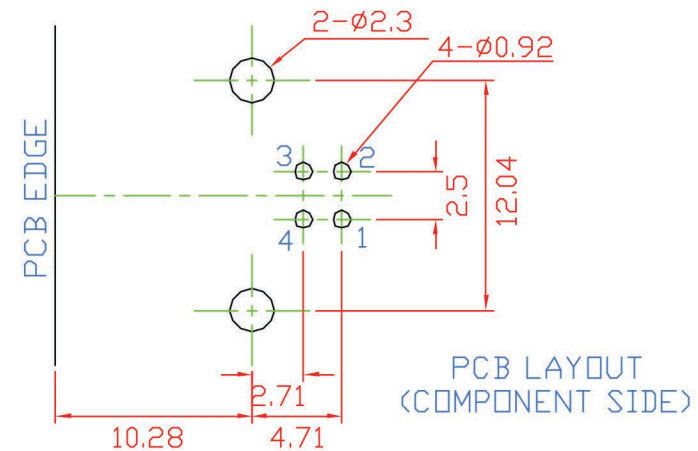

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

500V AC (rms) for 1 Minute(Rev. 2.0)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	PBT G.F.	BLACK		1
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	Gold30u" NI40~60u" TIN120u" (100% pure Tin of lead free plating)	4
3	SHELL	BRASS T:0.3	NICKEL PLATED	NI:80~120u"	1

ROHS COMPLIANT



GTK UK LTD.

COMPUTER NO.

UNIT

SCALE

PART NAME

mm

1:1

USB B TYPE FLAT 4 PIN DIP

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

MODEL

PAGE 1 OF 1

TINA

05-03-10

X. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05

USBS-BT1-B-2.0-R

A0