
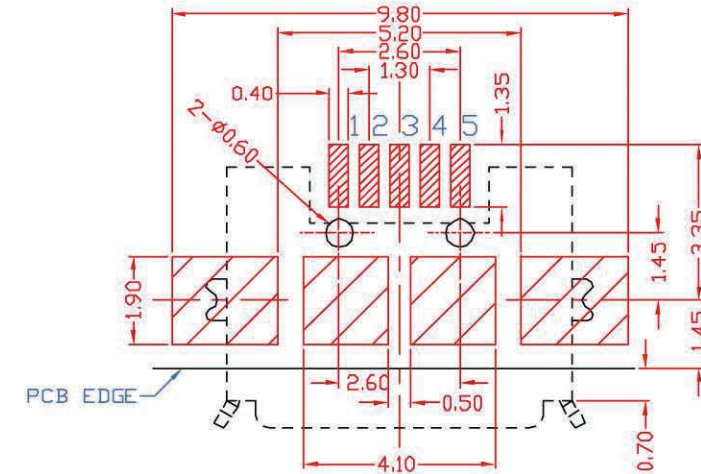
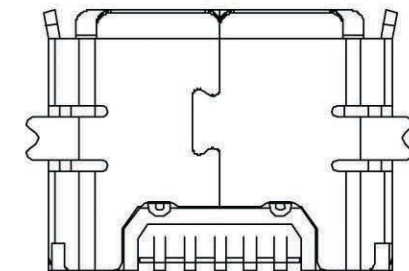
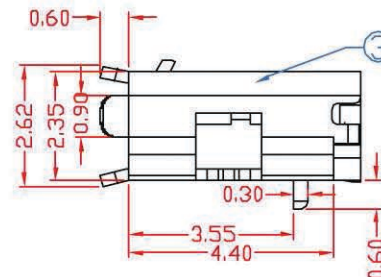
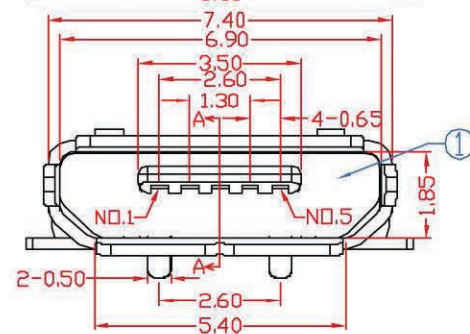
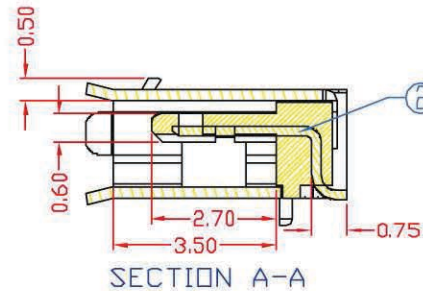


NO	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+GF30%	BLACK	1	
2	PIN TERM.	PHOS.BRONZE(EHD t0.20mm)	GOLD PLATED	5	Contact : Gold 30u" Other Area: Gold 1u"
3	SHELL	STAINLESS T=0.25	TIN PLATE(KHATTE Sn)	1	TIN: 120~200u"

REV	ZONE	REVISION	DATE

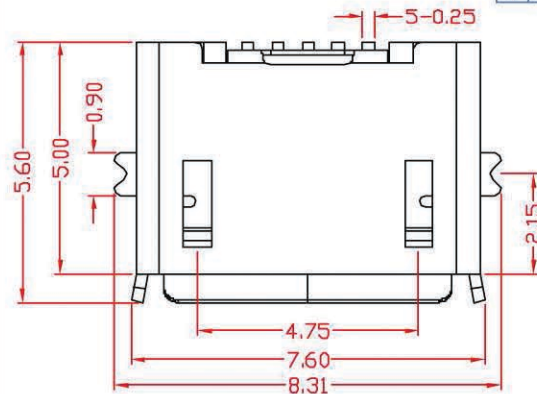

Specification:

*Contact Resistance:

(1)30m Ohm Max. at 100mA

(2)10,000 Cycles After: 40m Ohm Max.at 100mA

*Rated Voltage: AC 30V

*Contact Current Rating:

(1)Signal Line: 1A/Pin (No. 1 to 5)

(2)2-Line For Power: 1.8A/Pin(No. 1 and 5),0.5A/Pin(No. 2 to 4)

*Insulation Resistance: 100M Ohm Min. At 500V DC

*Dielectric Withstanding Voltage: 100V AC for 1 Minute

*Durability (Life Test): 10 , 000 Cycles Front

*Insertion Force: 35 Newton Maximum

*Extraction Force: 8 Newton Minimum.

*Operating Temperature: -30 °C± +80°C

*Solderability: 255 °C±5°C;5 Sec

ROHS COMPLIANT



GTK UK LTD.

MODEL

PAGE 1 OF 1

COMPUTER NO.

UNIT

SCALE

PART NAME

mm

1:1

MICRO USB B RECEPTABLE

APPD.

CKD.

DWG.

DATE

TOLERANCE

PART NO.

REV.

TINA

15-02-11

X.
X
XX
XXX

±0.38
±0.25
±0.13
±0.05

USBS-BT8-2.0-R

A0