

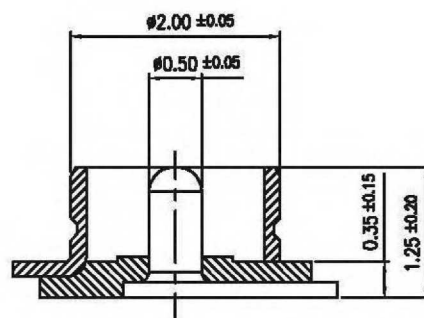

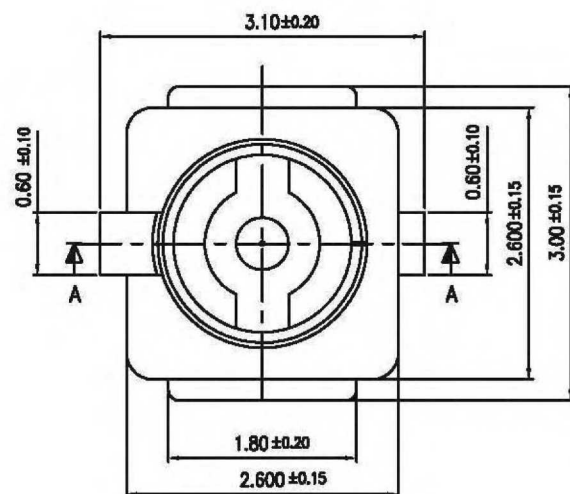



REV.	ECN	NO.	DATE



SEC. A-A

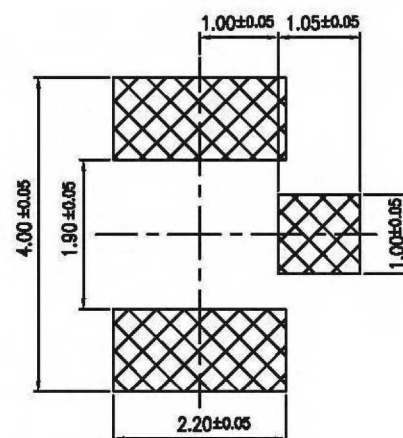

SCALE=15:1

RECOMMENDED FOOTPRINT PATTERN

NOTES:

- UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
- UNLESS OTHERWISE SPECIFIED, ALL RAD.=0.10mm
- MATERIAL :
 SIGNAL CONTACT : BRASS , C2680R-0 Gold flash plating
 GROUND SHIELD : PHOSPHOR BRONZE
 INSERT MOLDING : LCP + 30% G.F. REINFORCED
- INSULATOR BURRS 0.05 mm. MAXIMUM ALLOWED.
- ▲ SHOW CRITICAL DIMENSION.

ORDER CODE:

USC-R-SMT-x-R

L=on tape (not reeled)
 TR=tape +reel

PROJECTION 	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE
	LINEAR	ANGLE	
UNITS	.0 ± 0.15	X° REF ± 5°	MICRO COAXIAL CONNECTOR/RECEPTACLE VERTICAL TYPE/INSERTION MOLDING
MM[INCH]	.00 ± 0.10	X° ± 2°	
	.000 ± 0.05	X'X' ± 1'	
SCALE	DRAW Jared Chen	11-08-'06	PART NO. USC-R-SMT-x-R
20:1	DESIGN Jared Chen	11-08-'06	
SIZE	CHKD Allen Pao	11-08-'06	
A3	APPD. Y.C. Chen	11-08-'06	
			REV. 4A
			SHEET 1

(0,0)