


RoHS Compliant

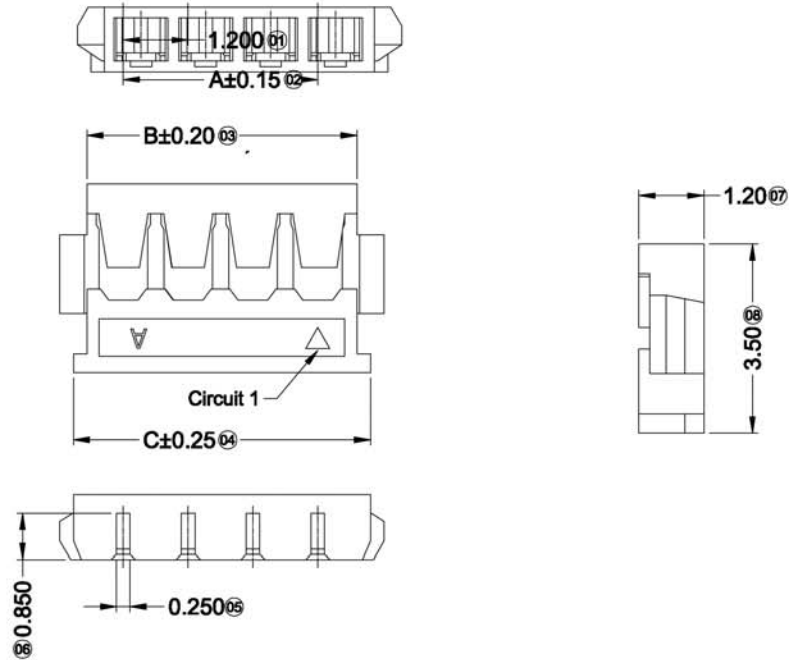

Poles	Dimensions(mm)		
	A	B	C
04	3.60	5.00	5.50

■ Electrical

- Voltage Rating : 50V AC/DC
 - Current Rating : 1.5A AC/DC
 - Withstanding Voltage : 500V AC /minute
 - Insulation Resistance : $\geq 100M\Omega$ min
 - Temperature Range : - 25°C to + 85°C
 - Contact Resistance : $\leq 20m\Omega$ max
After Environmental Testing: $\leq 40m\Omega$
- Applicable Wire/Cable:AWG #28 to #30, OD:0.5-0.6mm

■ Housing

- Poles : 2,3,4,5pin
- Material :
- Insulator:LCP/PA,UL94V-0 (Color:Black),

	Signature	Update
Drawn/Revised By	Jack	November 11th,2015
Checked By	Mike	August 16th,2012
Approved By	Tom	August 16th,2012

Title	1.2mm(.047") pitch Crimp Housing
Part No.	WB12-xxS-CF3-R



General Tolerance	Document No.	WB12-H
.X $\pm 0.25/.010$	Customer Info	Unidentified
.XX $\pm 0.15/.008$	Applicable for	Low profile devices
.XXX $\pm 0.10/.004$	Unit	mm/inch
Angular: $\pm 1^\circ$	Page	1/1