

SPECIFICATIONS


- . Voltage Rating : 50V AC/DC
- . Current Rating : 1A AC/DC
- . Withstanding Voltage : 500V AC/minute
- . Insulation Resistance : 100MΩ min
- . Temperature Range : -25°C to +85°C
- . Contact Resistance : 30mΩ max

TERMINAL

ORDER CODE:
WB1J-CR-FxxR-R


Plating:
T - Sn>50μ" over Ni>10μ"
G1 - Au>3μ" over Ni>30μ"

- . Applicable Wires : AWG# 26~30
- . Material : Phos. Bronze
- . Finish : Tin/Gold Plated
- . Thickness : 0.12mm
- . Q'ty : 15,000 pcs/Reel

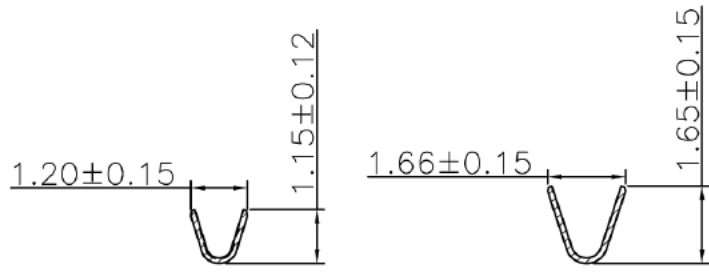



SECTION: A-A

SECTION: Z-Z



ROHS COMPLIANT

X.± 0.40	X°.± 5.0°	UNITS mm	NAME(INTENDED USE)	 GTK UK LTD.						
.X± 0.30	.X°.± 2.0°	MAT'L	CUSTOMER							
.XX± 0.20	.XX°.± 1.0°	FINISH	PART NO.(INTENDED USE)	TITLE:						
.XXX± 0.10	.XXX°.± ---		WB1J-CR-FTR-R	CONNECTOR TERMINAL						
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHYAO SHUNN ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHYAO SHUNN ELECTRONIC CO., LTD.</small>			APPD:	DWG NO.:						
			Q'TY	CHKD:	020-0098-1288S-T					
			DR: sunquan 2012.10.15	 <table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>2:1</td> <td>1/1</td> <td>/</td> </tr> </table>	SCALE	SHEET	REV.	2:1	1/1	/
SCALE	SHEET	REV.								
2:1	1/1	/								