

REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
C		增加剖面标识	CARRY	08-01/18
D		增加镀层测点标识	hejihuai	09-02/16
E		增加尺寸标注	sunquan	10-08/16
F		增加电镀规格(先冲后镀)	sunquan	11-02/17

SPECIFICATIONS


- . Voltage Rating : 125V AC/DC
- . Current Rating : 1A AC/DC
- . Withstanding Voltage ; 250V AC/minute
- . Insulation Resistance ; 100MΩ min
- . Temperature Range : -40°C to +85°C
- . Contact Resistance : 20mΩ max

ORDER CODE:

WBPM-CR-FxR-R

plating : T:tin over nickel
G:gold(3u")over nickel

- . Applicable Wires :AWG#28-32
- . Material : Phos. Bronze
- . Finish : Tin/Gold Plated
- . Thickness : 0.15mm
- . Q'ty : 15,000pcs/Reel

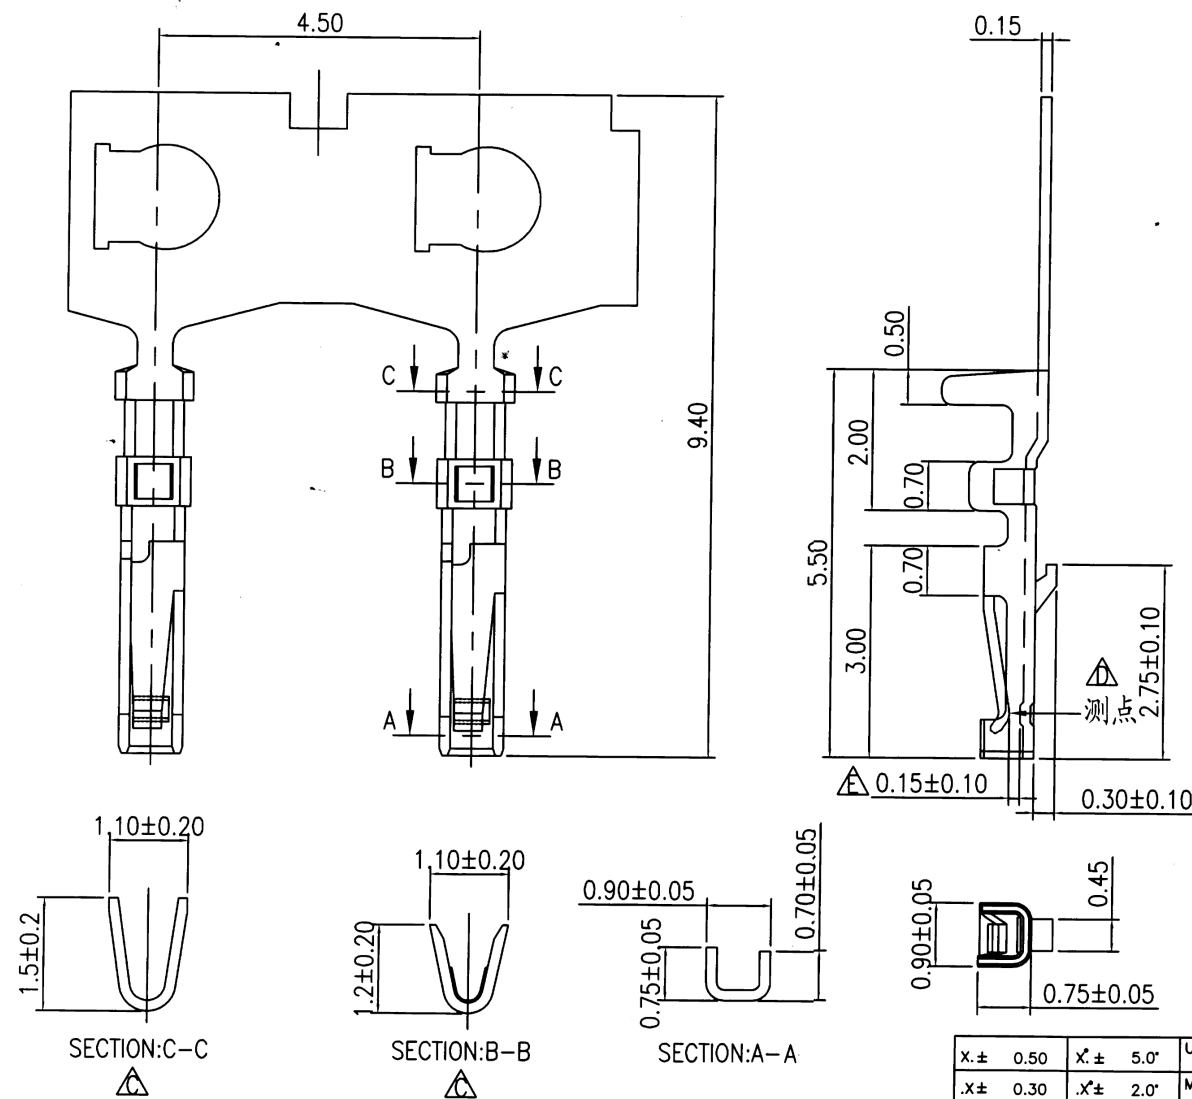

X.± 0.50	X'.± 5.0'	UNITS mm	GTK UK LTD.	Description: Crimp terminal for 1.25mm pitch WBPM series housing
.X± 0.30	.X'± 2.0'	MAT'L		
.XX± 0.20	.XX'± 1.0'	FINISH	PART NO.	DWG NO.: 020-0030-1258-T
.XXX± 0.10	.XXX'± 0.5'		WBPM-CR-FGR-R	
		Q'TY	APPD:	
			CHKD:	
			DR:	HEJIHUI 09-02/16
			SCALE	SHEET
			2:1	1/1
			REV.	F

符合环境管理物质