

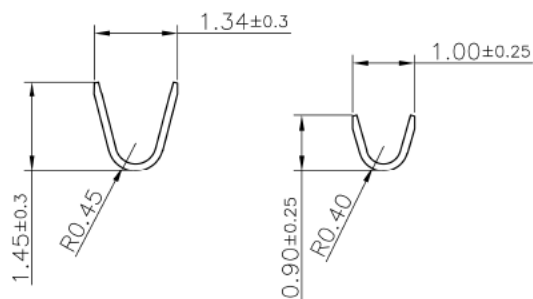
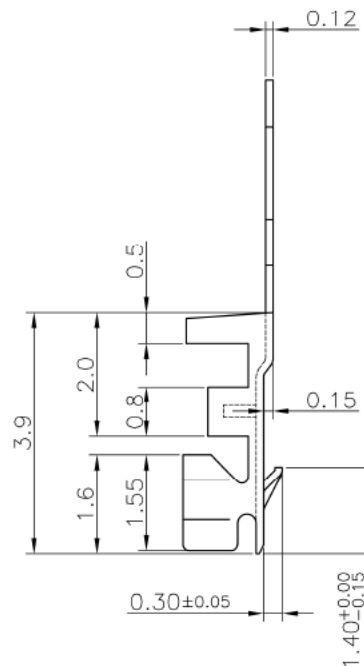


A4

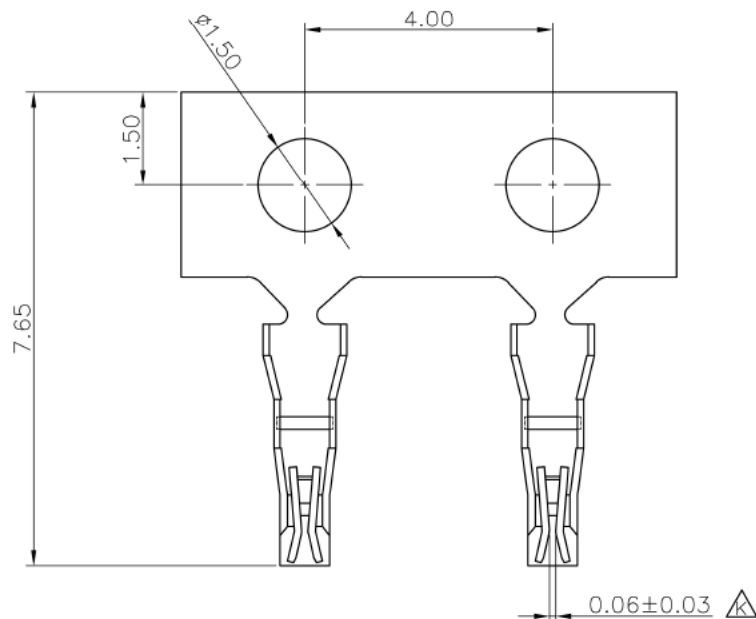

REV.	ECN NO.	REVISIONS	REV.DRAWN	DATE
G	----	修改SPECIFICATIONS	Asimo	2009/10/19
H	----	增加G4电镀规格	Asimo	2010/03/23
I	----	依客户要求, 增加开口尺寸	Sunquan	2010/05/28
J	11041	依客户要求, 修改卡钩高度及形状	Asimo	2011/12/27
K	----	尺寸0.10 ^{+0.00} _{-0.04} 变更为0.06 ± 0.03	YangSong	2015/12/15

SPECIFICATIONS:

- VOLTAGE RATING: 50V AC/DC
- CURRENT RATING: 1A, AC/DC
- WITHSTANDING VOLTAGE: 500V AC/DC
- INSULATION RESISTANCE: 100MΩ Min.
- TEMPERATURE RANGE: -25°C~+85°C
- CONTACT RESISTANCE: INITIAL VALUE: 20mΩ Max. AFTER ENVIRONMENTAL TESTING: 40mΩ Max.

NOTES:

- MATERIAL: PHOS.BRONZE(C5210-SH T=0.12)
- Q'TY: 15,000 PCS/REEL
- APPLICABLE WIRES: AWG#32~28
- PLATING; Sn>50μ" Ni>10μ"

ROHS COMPLIANT

符合环境管理物质

X. ± 0.40	X.* ± 5.0'	UNITS: mm	NAME(INTENDED USE):	gtk GTK UK LTD.	
.X ± 0.30	.X* ± 2.0'	MATERIAL:	CUSTOMER		
.XX ± 0.20	.XX* ± 1.0'	SEE NOTE	PART NO.(INTENDED USE):	TITLE:	
.XXX ± 0.10	.XXX* ± --	FINISH:	WTBI-CRFT-R	1.00mm Crimp Style Connector	
		SEE NOTE	APPD:	DWG NO.:	
		Q'TY:	CHKD:		
		SEE NOTE	DR:		
			Asimo 2010/03/23		
				SCALE	SHEET
				8:1	1/1
				REV.	J