


ROHS COMPLIANT

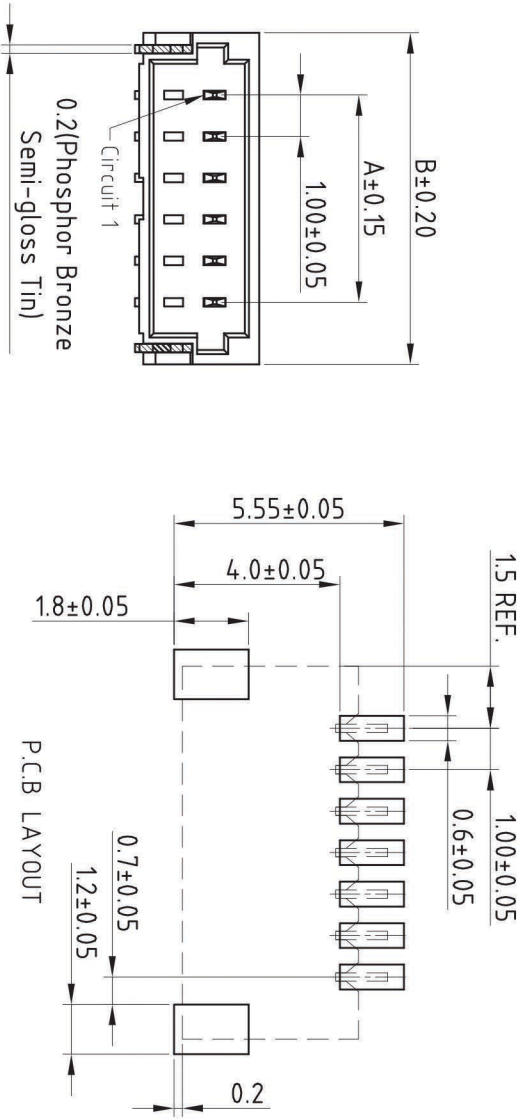

Specification



Pitch Between Poles : 1.00mm
Current Vating : 1A AC/DC
Voltage Rating : 50V AC/DC
Contact Resistance : 20mΩ MAX.
Insulation Resistance : 100MΩ MIN.
Withstand Voltage : 500V AC/Minute
Temperature Range : -25°C To+85°C

Features

Available Number Of Circuits : 1x02 To 1x20
Material : Nylon 9T UL 94V-0
Contact: 0.2mm(.008")Flat Pin,Phosphor Bronze,
Semi-gloss Tin
Mates With: WTBL- Series Single Row Housing
Product Ordering Code:

WTBL-xxS-SMH1T-R

Number of circuits

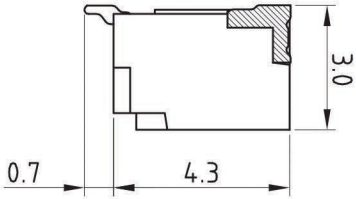

Dimensional Information

Circuits	DIM:(mm)		Circuits	DIM:(mm)	
	A	B		A	B
2	1.00	4.00	12	11.00	14.00
3	2.00	5.00	13	12.00	15.00
4	3.00	6.00	14	13.00	16.00
5	4.00	7.00	15	14.00	17.00
6	5.00	8.00	16	15.00	18.00
7	6.00	9.00	17	16.00	19.00
8	7.00	10.00	18	17.00	20.00
9	8.00	11.00	19	18.00	21.00
10	9.00	12.00	20	19.00	22.00
11	10.00	13.00			

REVISION RECORD	DATE

UNIT: mm

GENERAL TOLERANCE

ANGLE

DIM:

±5°

X.X ±0.25
X.XX ±0.15
X.XXX ±0.08

SCALE: 1 : 1

SHEET: 1 OF 1

DRAWN: *Flu2in*

CHECKED: *WayNe*



GTK UK LTD.

DESCRIPTION: 1.00mm PITCH WIRE TO BOARD CONNECTOR

SIZE

A4

PART NO: WTBL-xxS-SMH1T-R