


HSF

ROHS COMPLIANT


NOTES:

Current Rating:1.0A
 Voltage Rating:100V AC,DC
 Contact Resistance:20mΩ max
 Withstand Voltage:800V AC/minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to +85℃

Contact Material:Brass
 Contact plating Sn Over Ni
 Insulator Material:PA6T+30%G.F(UL94V-0)

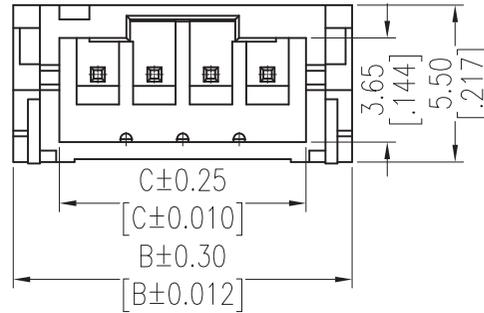

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)


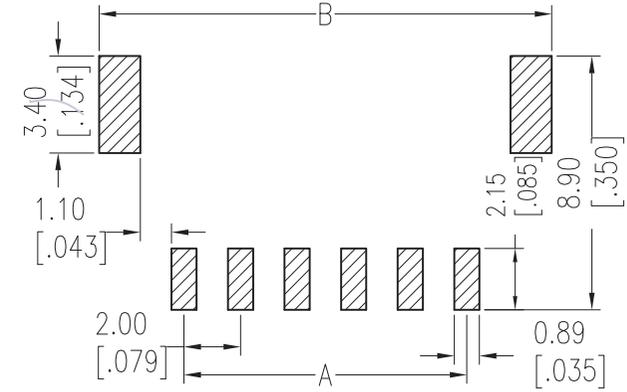


Dimensional & Ordering Information:

ORDER CODE:

WTBM-xxS-SMH1T-R

No of contacts:
 02-16

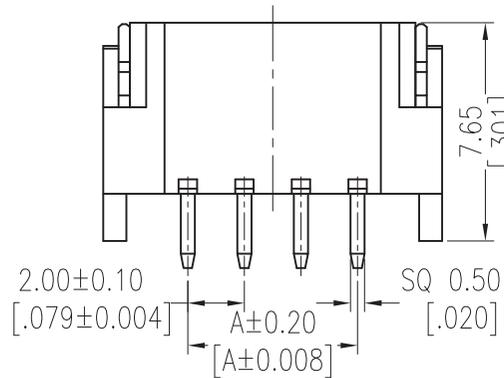

No of pos	Dimensions (mm)		
	A	B	C
2	2.0	8.0	4.72
3	4.0	10.0	6.72
4	6.0	12.0	8.72
5	8.0	14.0	10.72
6	10.0	16.0	12.72
7	12.0	18.0	14.72
8	14.0	20.0	16.72
9	16.0	22.0	18.72
10	18.0	24.0	20.72
11	20.0	26.0	22.72
12	22.0	28.0	24.72
13	24.0	30.0	26.72
14	26.0	32.0	28.72
15	28.0	34.0	30.72
16	30.0	36.0	32.72

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	JYHuang	2012/08/25	UNIT	mm	WTBM-SMH1T-R
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
AO	2012/08/25	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.0mm Pitch R/A header, SMT
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

gtk GTK UK LTD.