


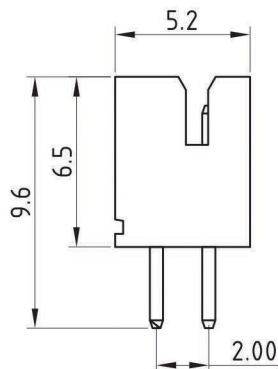
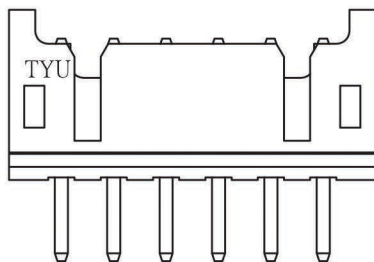



2x2~3P

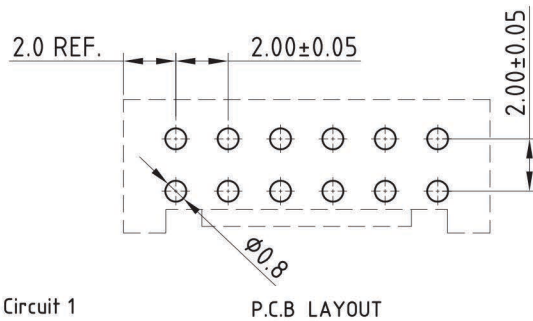

2x4~16P

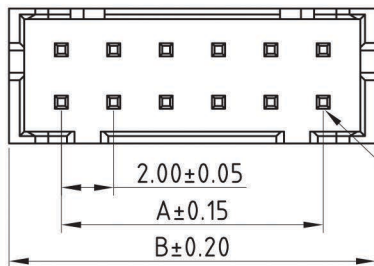

Specification

Pitch Between Poles : 2.00mm  
 Current Rating : 3A AC/DC  
 Voltage Rating : 100V AC/DC  
 Contact Resistance : 20mΩ MAX.  
 Withstand Voltage : 800V AC/Minute  
 Insulation Resistance : 1,000MΩ MIN.  
 Temperature Range : -25°C To +85°C  
 Applicable P.C.B Thickness : 1.6mm  
 Applicable P.C.B Hold Dia. : Ø 0.8mm ± 0.05

Features

Available Number Of Circuits : 2x02 To 2x20  
 Material : Nylon 66 UL 94V-0 Glass-filled  
 Contact : 0.50mm(.020") Square Pin,  
 Brass, Tin-plated  
 Mates with: WTBM- Series Housing

Product Ordering Code:

WTBM-xxD-TH2T-R

└─ Number of circuits

Dimensional Information

Circuits	DIM:(mm)		Circuits	DIM:(mm)	
	A	B		A	B
4	2.00	5.90	24	22.00	25.90
6	4.00	7.90	26	24.00	27.90
8	6.00	9.90	28	26.00	29.90
10	8.00	11.90	30	28.00	31.90
12	10.00	13.90	32	30.00	33.90
14	12.00	15.90	34	32.00	35.90
16	14.00	17.90	36	34.00	37.90
18	16.00	19.90	38	36.00	39.90
20	18.00	21.90	40	38.00	41.90
22	20.00	23.90			

ROHS COMPLIANT



GTK UK LTD.

UNIT: mm

GENERAL TOLERANCE

ANGLE

DIM:

X.X ±0.30  
 X.XX ±0.20  
 X.XXX ±0.10

±5°

SCALE: 1 : 1

SHEET: 1 OF 1

DRAWN: *HuZin*

CHECKED: *WayNe*

REV

REVISION RECORD

DATE

SIZE

DESCRIPTION: 2.00mm PITCH WIRE TO BOARD CONNECTOR 180°

A4

PART NO: WTBM-xxD-TH2T-R