


FEATURES:

- . 2-20 Circuits
- . Friction lock
- . Nylon [UL 94V-0]
- . Accepts double cantilever crimp terminal
- . Part Number: WTBM-xxS-TH2T-R

No of pos:02-20

SPECIFICATIONS:

- . Current rating: 2A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperatur range: -40°C ~+ 105°C
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

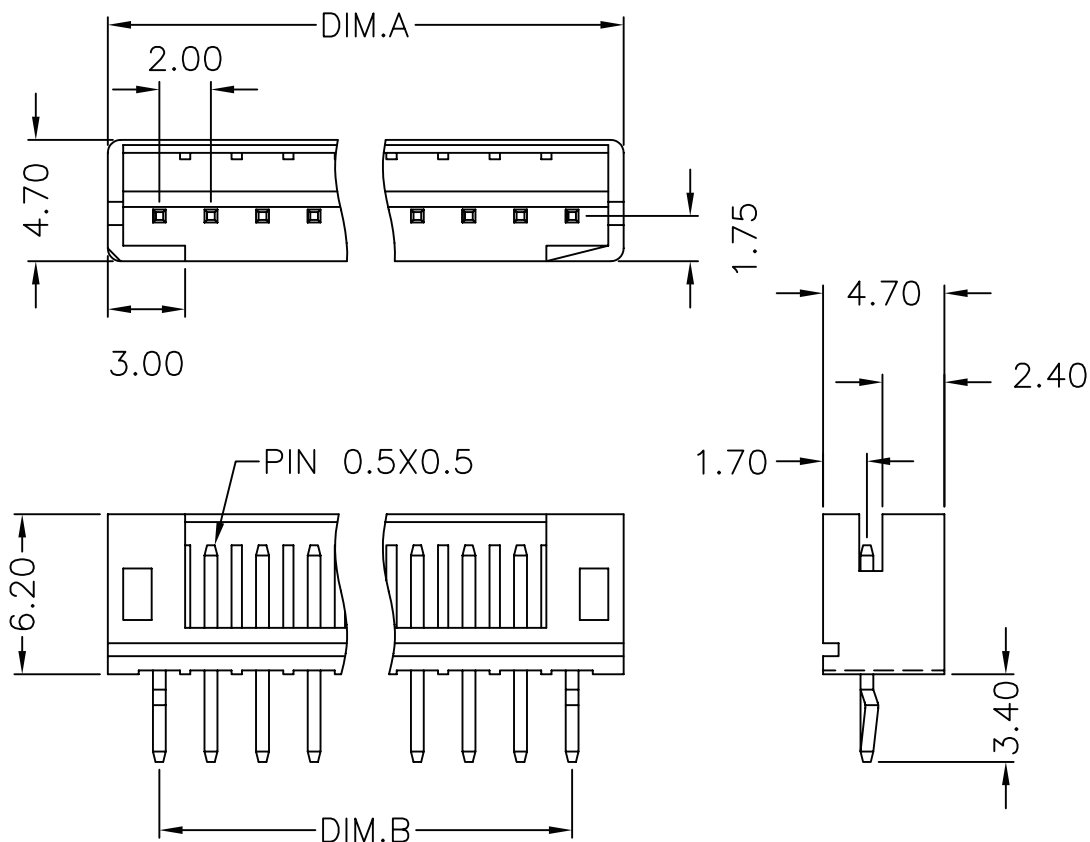

PIN數	DIM.A	DIM.B
02	6.10	2.00
03	8.10	4.00
04	10.10	6.00
05	12.10	8.00
06	14.10	10.00
07	18.10	12.00
08	20.10	14.00
09	22.10	18.00
10	24.10	20.00
11	26.10	22.00

PIN數	DIM.A	DIM.B
12	28.10	24.00
13	30.10	26.00
14	32.10	28.00
15	34.10	30.00
16	36.10	32.00
17	38.10	34.00
18	40.10	36.00
19	42.10	38.00
20	44.10	40.00

RoHS compliant

TOLERANCE  
 X.X=±.20  
 X.XX=±.10  
 X.XXX=±.05

版本	1.0	ECR編號	修改內容				
TITLE:		CUSTOMER APPROVAL		REVISION	THIRD ANGLE PROJECTION		
P/N:		REV.	DESCR.	DATE	SIGN	DRAWN:	
WTBM-xxS-TH2T-R		路徑: \\DUNCAN\D\MIRIAM\ENGINEER\6600\				CHECKED	
		APPROVED		DATE	2007.12.24	SCALE	
				UNIT	MM		

