
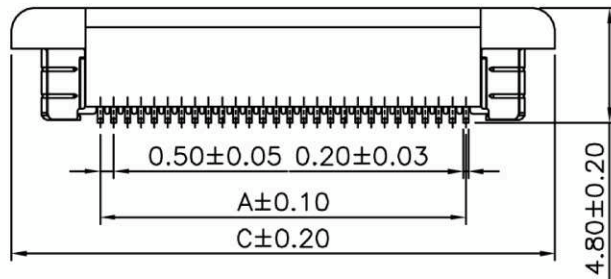



RoHS Compliant

Customer Drawing

No.	A	B	C
04	1.50	2.6	7.50
05	2.00	3.1	8.00
06	2.50	3.6	8.50
07	3.00	4.1	9.00
08	3.50	4.6	9.50
09	4.00	5.1	10.00
10	4.50	5.6	10.50
11	5.00	6.1	11.00
12	5.50	6.6	11.50
13	6.00	7.1	12.00
14	6.50	7.6	12.50
15	7.00	8.1	13.00
16	7.50	8.6	13.50
17	8.00	9.1	14.00
18	8.50	9.6	14.50
19	9.00	10.1	15.00
20	9.50	10.6	15.50
21	10.00	11.1	16.00
22	10.50	11.6	16.50
23	11.00	12.1	17.00
24	11.50	12.6	17.50
25	12.00	13.1	18.00
26	12.50	13.6	18.50
27	13.00	14.1	19.00
28	13.50	14.6	19.50
29	14.00	15.1	20.00
30	14.50	15.6	20.50
31	15.00	16.1	21.00
32	15.50	16.6	21.50
33	16.00	17.1	22.00
34	16.50	17.6	22.50
35	17.00	18.1	23.00
36	17.50	18.6	23.50
37	18.00	19.1	24.00
38	18.50	19.6	24.50
39	19.00	20.1	25.00
40	19.50	20.6	25.50
41	20.00	21.1	26.00
42	20.50	21.6	26.50
43	21.00	22.1	27.00
44	21.50	22.6	27.50
45	22.00	23.1	28.00
46	22.50	23.6	28.50
47	23.00	24.1	29.00
48	23.50	24.6	29.50
49	24.00	25.1	30.00
50	24.50	25.6	30.50
51	25.00	26.1	31.00
52	25.50	26.6	31.50
53	26.00	27.1	32.00
54	26.50	27.6	32.50
55	27.00	28.1	33.00
56	27.50	28.6	33.50
57	28.00	29.1	34.00
58	28.50	29.6	34.50
59	29.00	30.1	35.00
60	29.50	30.6	35.50

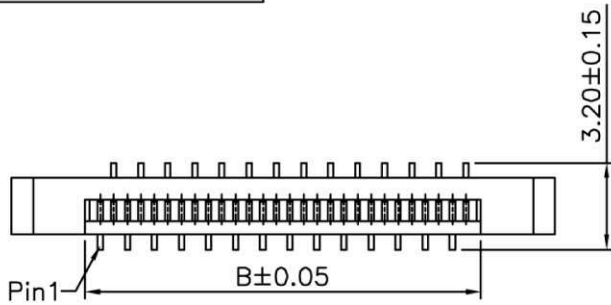


Specifications:


Current Rating: 0.4A AC/DC
 Voltage Rating: 50V(200Hz) AC/DC
 Contact resistance: 20m Ohm Max.
 Insulator resistance: 500M ohm min.
 Withstanding Voltage: 200V AC/Minute
 Operating Temperature Range: -25°C ~ +85°C
 Material And Finish
 Insulator: Nylon9T UL94V-0, Color: White
 ZIF: Nylon9T UL94V-0, Color: Black
 Contact: Phosphor Bronze
 Contact Plated: Tin Plated.

ORDER CODE
 ZIFExx-0.5Vx-R

Number of Contact
 PCB Layout
 VA=A type
 VB=B type
 Packaging:
 -R : with film
 Tape & Reel
 -U-R: Tube

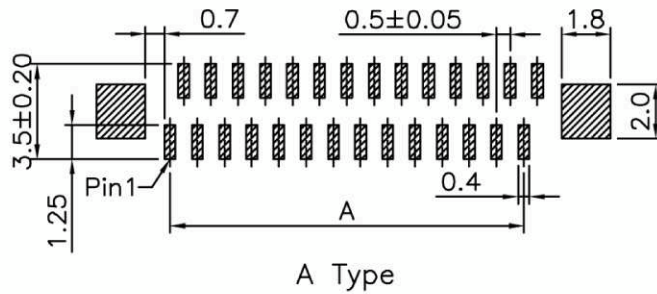

Recommended PCB Layout

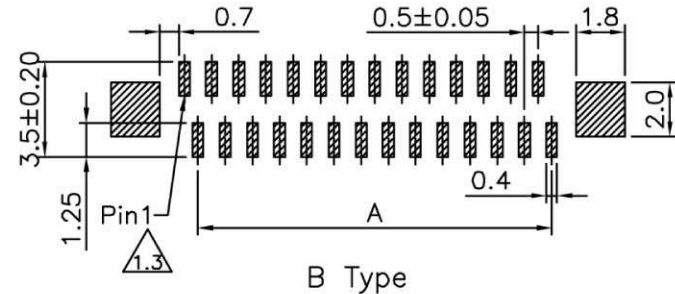

Recommended PCB Layout



MAT'L:

FINISH:

xx: ±0.40	x: ±2'
x: ±0.25	x.x: ±1'
x.x: ±0.15	x.xxx:
x.xx: ±0.10	x.xxx':
UNIT: mm	
SCALE: 1:1	SHEET: 1/1

TITLE :
 0.5mm Pitch FFC/FPC Connector
 Top Entry ZIF Slide Actuator SMT

A4

PART NO : ZIFExx-0.5Vx-R
DWG. NO.: RDA100708-003(JD)
REV.: 1.3
DATE: 23-JUL-2012