


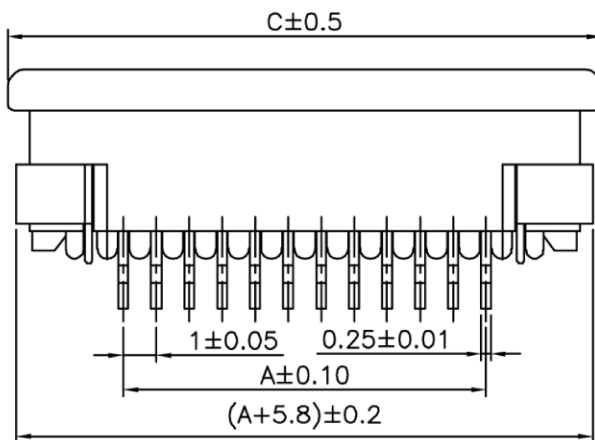



RoHS Compliant

Customer Drawing

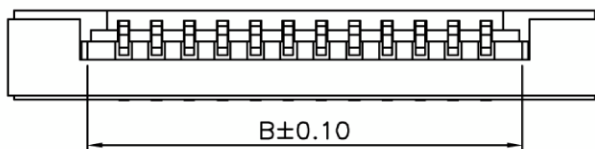


Specifications:
 Current Rating:0.4 Amp
 Voltage Rating:50V AC/DC
 Contact resistance:20m Ohm Max.
 Insulator resistance:500M ohm min.
 Withstanding Voltage:200V AC/Minute
 Operating Temperature Range:-25°C~+85°C
 Material And Finish
 Insulator:Nylon 9T UL94V-0
 Contact:Phosphor Bronze
 Contact Plated:Tin plated.


ZIFExx-1.0TS-R
 Number of Contact
 Packing
 -R= Tape+Reel
 -U-R= Tube

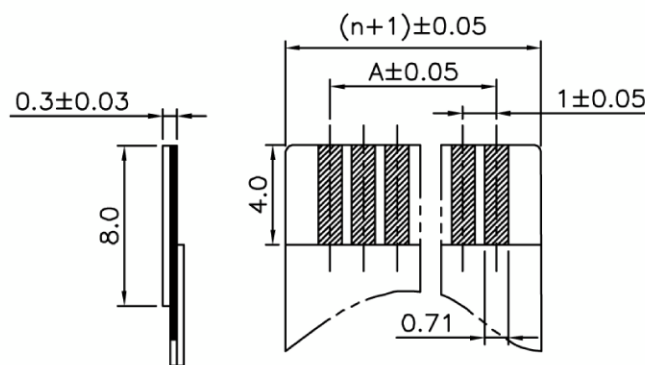

Proper Cable



Assembly Layout

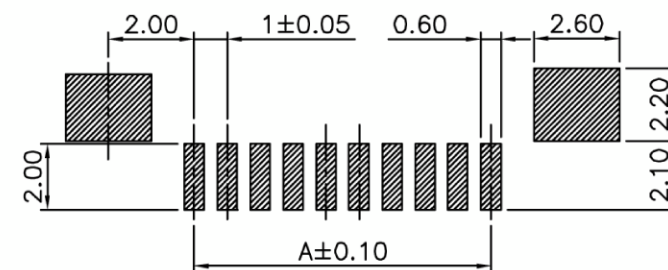

Recommended PCB Layout

No.	A	B	C
04	3.00	5.10	10.5
05	4.00	6.10	11.5
06	5.00	7.10	12.5
07	6.00	8.10	13.5
08	7.00	9.10	14.5
09	8.00	10.10	15.5
10	9.00	11.10	16.5
11	10.00	12.10	17.5
12	11.00	13.10	18.5
13	12.00	14.10	19.5
14	13.00	15.10	20.5
15	14.00	16.10	21.5
16	15.00	17.10	22.5
17	16.00	18.10	23.5
18	17.00	19.10	24.5
19	18.00	20.10	25.5
20	19.00	21.10	26.5
21	20.00	22.10	27.5
22	21.00	23.10	28.5
23	22.00	24.10	29.5
24	23.00	25.10	30.5
25	24.00	26.10	31.5
26	25.00	27.10	32.5
27	26.00	28.10	33.5
28	27.00	29.10	34.5
29	28.00	30.10	35.5
30	29.00	31.10	36.5



GTK UK LTD.

MAT'L:

FINISH:

XX.: ±0.40
 X.: ±0.25
 X.X: ±0.15
 X.XX: ±0.10

X.: ±2°
 X.X: ±1°

UNIT: mm

SCALE: 1:1

SHEET: 1/1

TITLE :
 1.0mm Pitch FFC/FPC Connector Side
 Entry Top Contact ZIF Slide Actuator



A4

PART NO : ZIFExx-1.0TS-R







DWG. NO.: RDA101207-004(JD)

REV.:1.3

DATE:07-Dec-2010

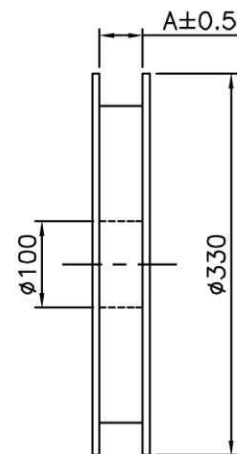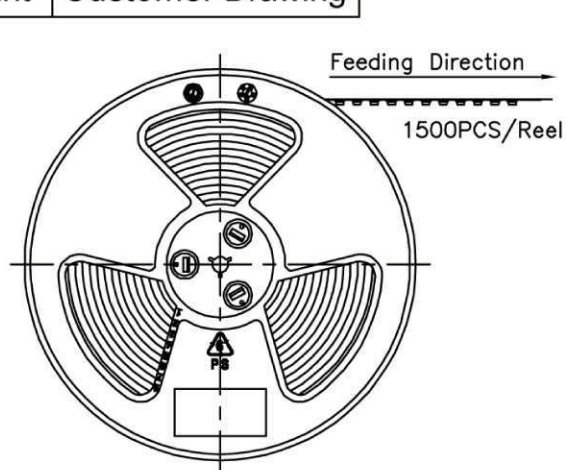

No.	A	B	C	D
4P~11P	24.5	24.0	11.5	
12P~15P	32.5	32.0	14.25	28.50
16P~25P	44.5	44.0	20.25	40.50
26P~30P	56.5	56.0	26.25	52.50

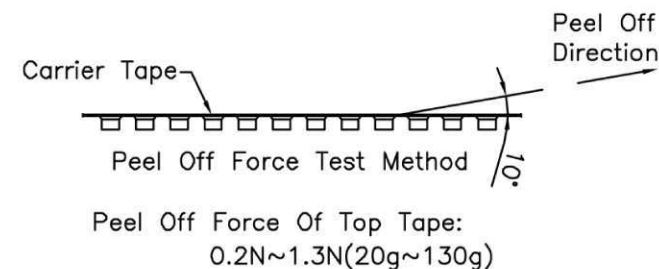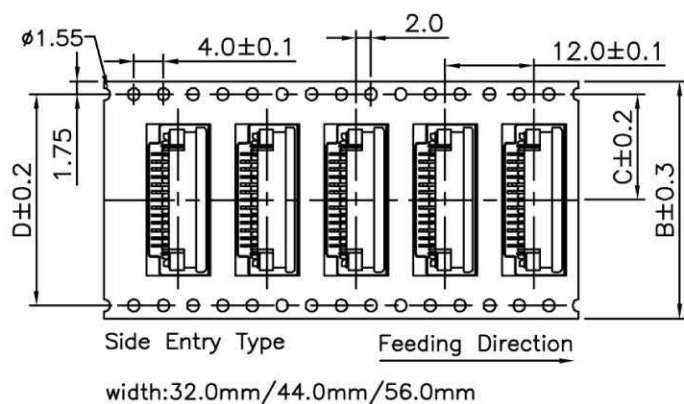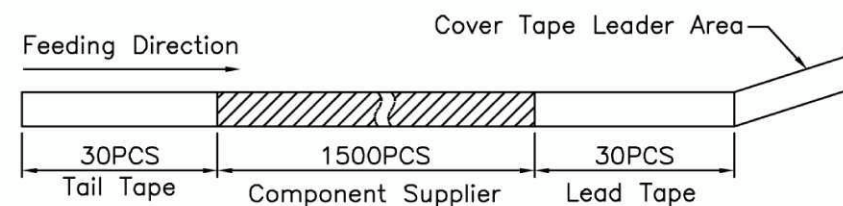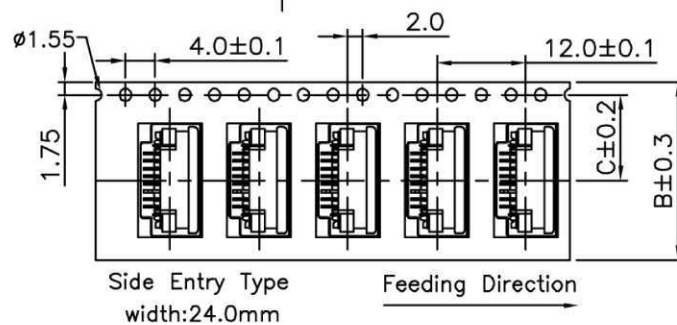

GTK UK LTD.

MAT'L:

FINISH:

XX: ±0.25
X: ±0.20
X.X: ±0.15
X.XX: ±0.08

XXX: ±0.40
X.XXX: ±0.05
X': ±2"
X.X': ±1"

UNIT: mm



SCALE: 1:1

SHEET: 1/1

TITLE :
1.0mm Pitch FFC/FPC Connector Side
Entry Top Contact ZIF Slide Actuator

A4

PART NO : ZIFExx-1.0TS-R

DWG. NO.: RDA101207-004(JD)

REV.:1.3

DATE: 10-Dec-2010